





REV	DATE	CHANGE BEFORE	CHANGES	DRAW
Δ	02.12.10			



Conn.1 USB2.0 A Type Female

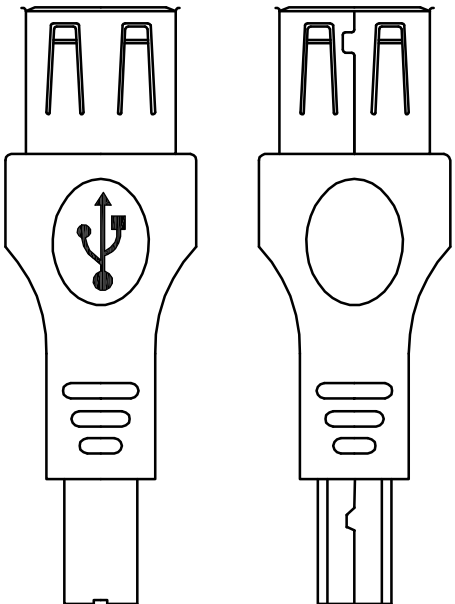

Conn.2 USB2.0 B Type Male



- Electronic Test:
1. Contact Resistance: 2ohm max
 2. Insulation Resistance: 10M ohm min
 3. Hi - Pot : 300V DC/10ms
 4. All Materials With RoHS Standard
 5. 100% test when it is open and short

Pin Assignment

Conn.1	Conn.2
1	1
2	2
3	3
4	4
Shell	Shell
	Shield



Item no.

61098

Barcode: 4043619610983

File: 460

NO.	NAME	DESCRIPTION	UNIT	Q'TY
4	OUTER MOLD	50P PVC COLOR:BLACK	9	15
3	CONNECTOR	USB"B" male Solder Type Pin Gold Plated Insulation White Shell NICKEL Plated	pcs	1
2	CONNECTOR	USB"A" female Solder Type Pin Gold Plated Insulation White Shell NICKEL Plated	pcs	1
1	CABLE	30AWG L=20mm	pcs	5