


Connector eSATAp female eSATAp + USB 2.0

Description

This connector by Delock can be soldered on your PCB. Due to the multifunctional Power Over eSATA interface, you have 3 options for connection:

1. Power Over eSATA port
2. USB port
3. eSATA port + USB port for power supply

Images

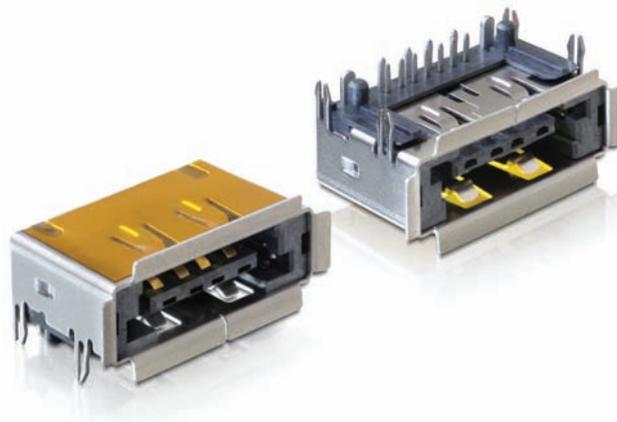

Ref.	65283
EAN	4043619652839
Country of origin	Taiwan
Customs tariff number	84718000

Specification

- Connector: eSATAp + USB 2.0 female > 11 pin DIP type
- THT PCB assembly
- USB solder pins: Ø 0.6 mm
- eSATA solder pins: Ø 0.44 mm, pitch: 1.27 mm
- Housing material: thermoplastic high temp UL 94-V0
- Operating temperature: -40 to +85 °C
- Contact area (eSATA + USB): gold-plated
- Dimension (LxWxH): 18.7 mm x 11.35 mm 8.68 mm

System requirement

- PCB with eSATA + USB 2.0 through holes

Package content

- Connector

Package

- Delock poly bag