

# PCI Card > 2 x Serial with power management


## Description

The Delock PCI card expands your PC by two external serial ports. The serial ports support a voltage of 5 V and 12 V, which can be set through the jumper. Thus you do not require an additional power supply for the connected devices.



Ref.	89303
EAN	4043619893034
Country of origin	China
Customs tariff number	84733020

## Images

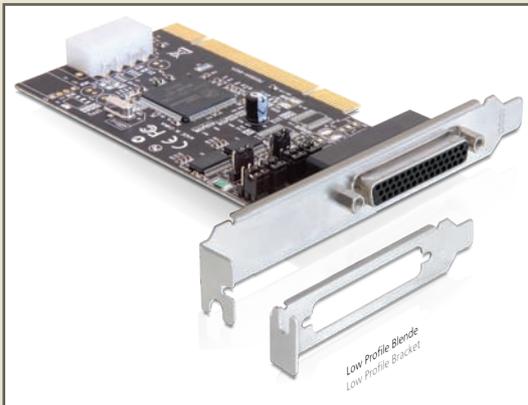

## Specification

- Chipset: Oxford OXuPCI952
- Connector: 2 x serial RS-232 DB9 male  
1 x internal power connector 4 pin Molex male
- Serial connector will be lead outside through a cable
- Data transfer rate up to 230.4 Kb/s
- Compatible with 16C950 UART
- FIFO: 128 byte
- ±15KV ESD protection on all signal pins
- 5 V or 12 V voltage can be set individually for each port through the jumper (Pin 1/4/8/9)
- I/O address and IRQ assigned by BIOS
- 32-Bit PCI standard 3.0
- Also suitable for a 64-bit PCI slot

### System requirements

- Windows XP/XP-64/Vista/Vista-64/7/7-64
- PC with one free PCI Slot
- Power supply with a free Molex power connector

### Package content

- PCI card, 1 serial connecting cable,
- Low profile bracket, Driver CD, User manual

### Package

- Retail Box