

# Specification

## 88437

Antenne LTE RP-SMA Kippgelenk 0,5 - 4,5 dBi Delock

EAN: 4043619884377



edition: 06/2012

# Specification

## 88437

Antenne LTE RP-SMA Kippgelenk 0,5 - 4,5 dBi Delock


EAN: 4043619884377

### Specification

Frequency range	824 MHz - 894 MHz	1920 – 2170 MHz
Peak gain	0,5 ~ 2,0 dBi	3 - 4,5 dBi
VSWR	3,0 : 1 max.	2,0 : 1 max.
Polarization	Linear, vertical	
Impedance	50 Ohm	
Connector	RP-SMA Plug	

### Enviromental & Mechanical Characteristics

Temperature	-10°C ~ 55°C
Humidity	95%@55°C

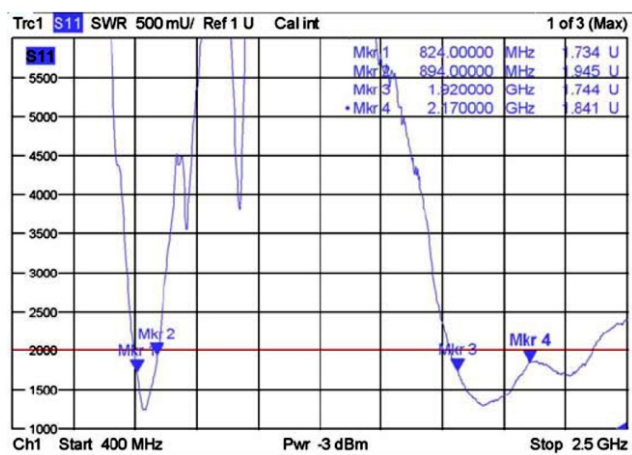


# Specification

## 88437

Antenne LTE RP-SMA Kippgelenk 0,5 - 4,5 dBi Delock

EAN: 4043619884377

### Mechanical drawing

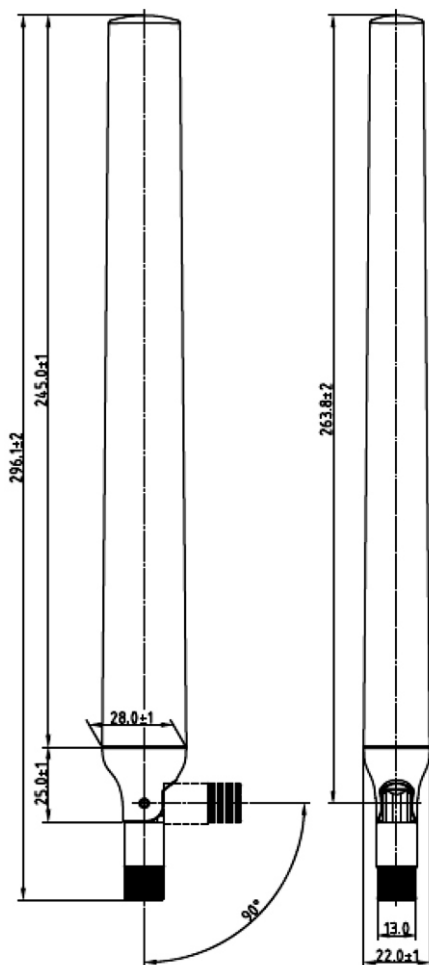

# Specification



## 88437

Antenne LTE RP-SMA Kippgelenk 0,5 - 4,5 dBi Delock



EAN: 4043619884377

### Antenna pattern



*H-plane*

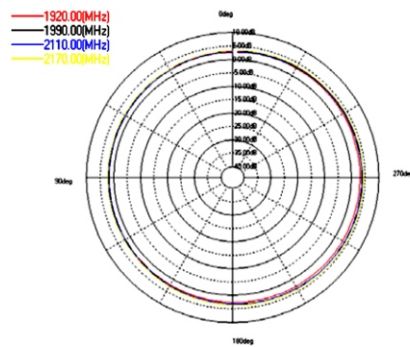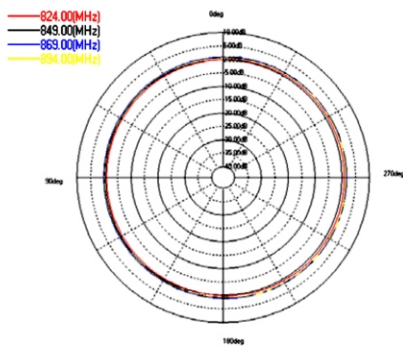

*V1-plane*

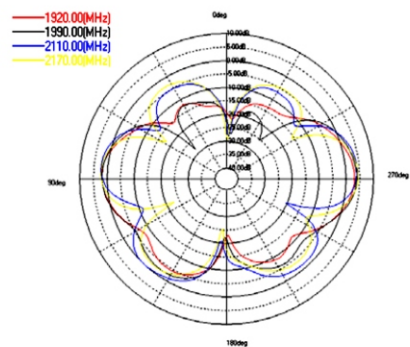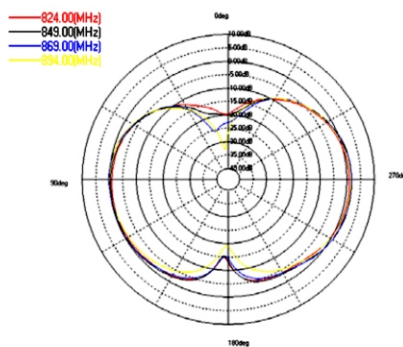

*V2-plane*

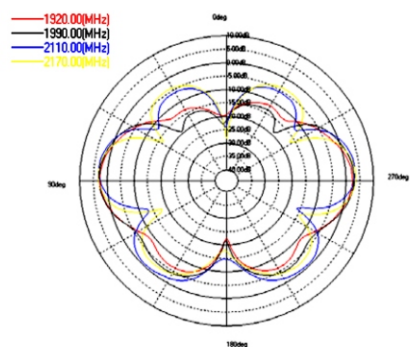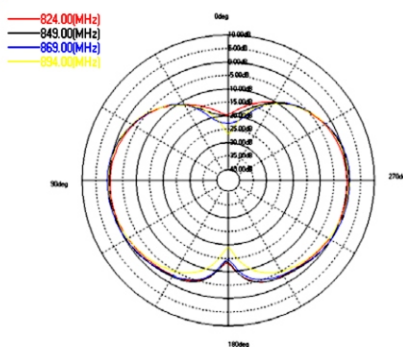

# Specification

## 88437

Antenne LTE RP-SMA Kippgelenk 0,5 - 4,5 dBi Delock

EAN: 4043619884377

### **Support Delock**

If you have further questions, please contact our customer support

[support@delock.de](mailto:support@delock.de)

You can find current product information on our homepage: [www.delock.com](http://www.delock.com)

### **Final clause**

Information and data contained in this manual are subject to change without notice in advance. Errors and misprints excepted.

### **Copyright**

No part of this user manual may be reproduced, or transmitted for any purpose, regardless in which way or by which means, electronically or mechanically, without explicit written approval of Delock.

Edition: 06/2012