




REV	DATE	CHANGE BEFORE	CHANGES	DRAW
Δ	02.12.10			

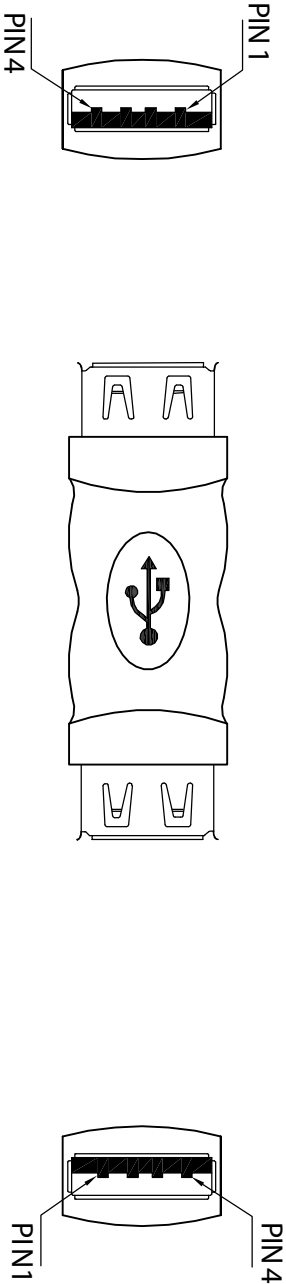

Conn. 1 USB2.0 A Type Female

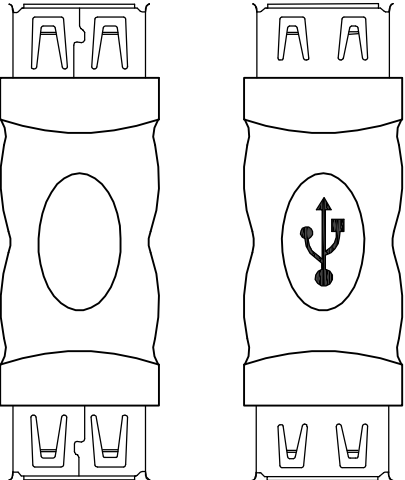

Conn. 2 USB2.0 A Type Female



- Electronic Test:
1. Contact Resistance : 2ohmmax
  2. Insulation Resistance : 10M ohm min
  3. Hi - Pot : 300V DC/10ms
  4. All Materials With RoHS Standard
  5. 100% test when it is open and short

Conn. 1 Conn. 2 Pi n Assignment

- |       |       |       |       |        |
|-------|-------|-------|-------|--------|
| 1     | _____ | 1     | _____ | VBUS   |
| 2     | _____ | 2     | _____ | D-     |
| 3     | _____ | 3     | _____ | D+     |
| 4     | _____ | 4     | _____ | GND    |
| Shell | _____ | Shell | _____ | Shield |

3	OUTSIDE MOLDING	50P PVC COLOR: Black	9	15
2	CONNECTOR	USB" A" female Sol der Type Pi n Gold Plated Insulation White Shell NICKEL Plated	pcs	2
1	CABLE	30AWG L=32mm	pcs	5
NO	NAME	DESCRIPTION	UNIT	QTY



Item no. 65012

Barcode: 4043619650125

File: 460