



DATE	REV	DESCRIPTION	BY
2015.02.26	A/0	NEW	JFL

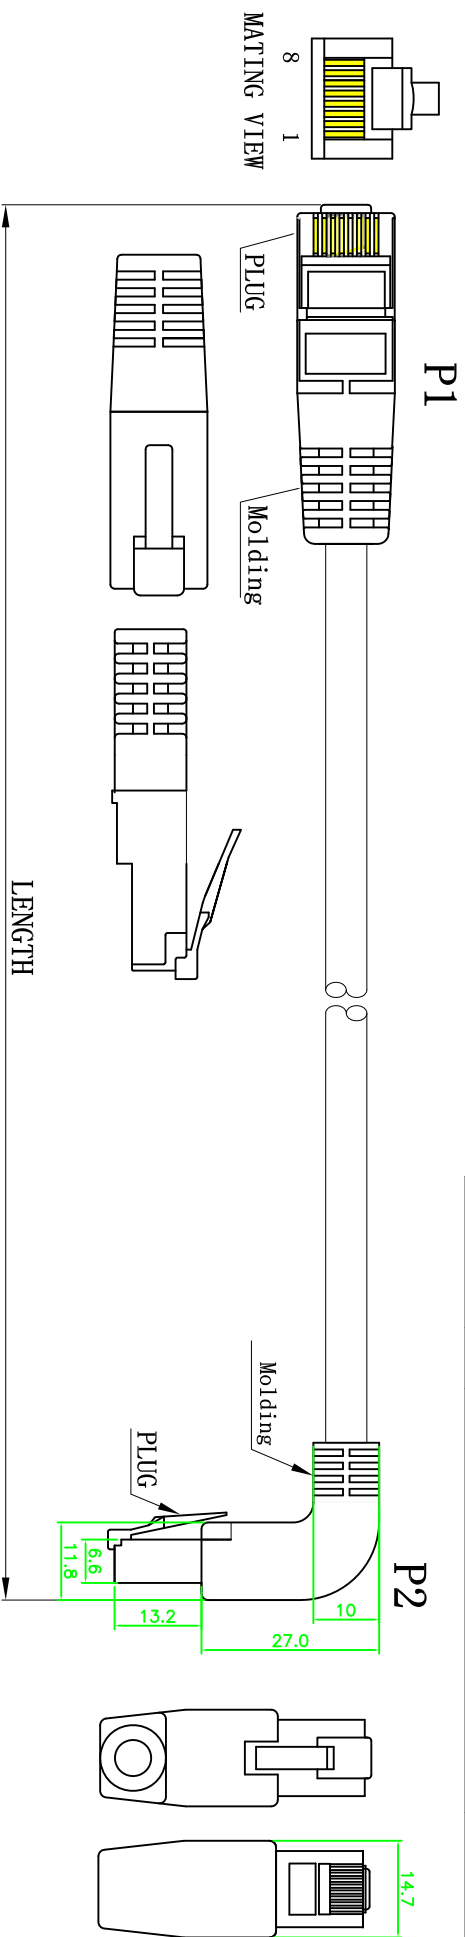

Marking: CAT. 6A SSTP LSOH 26AWGX4P PATCH 3P VERIFIED TO ISO/IEC 11801 ED.2 & ANSI/TIA-568-C.2
<FP0036> & IEC 60332-1-2

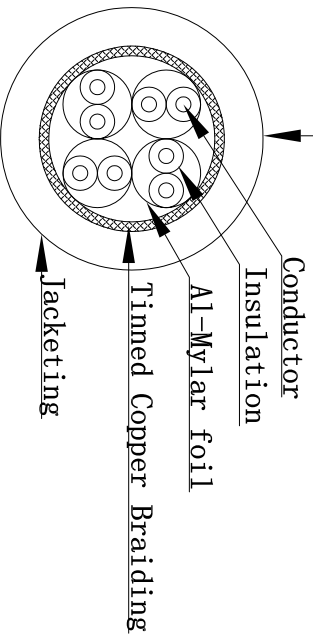

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

ITEM NO.	LENGTH(mm)
83644	500±30
83645	1000±30
83646	2000±30

PINOUT			
PA/R	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8



we move the world

Item no. 83644 / 83645 / 83646

Title: Cable RJ45 C6A SSTP angled / straight

UNIT

PAGE

File No.

Key Size	3RD	General
Length	△	▽
(mm)	Critical	Normal

0-15	±0.05	±0.10	±1.0
15-60	±0.10	±0.20	±1.5
60-150	±0.15	±0.35	±2.0
150-350	±0.20	±0.50	±2.0
350-1000	±0.40	±0.65	±2.0

Conductor	Bare Copper 26AWG		
Insulation	Thickness:MIN at any point:0.2mm MAX AVG:0.35mm Diameter:1.05±0.06mm		
	Jacket	LSOH	Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:5.7±0.3mm
Wire	CAT. 6A S/FTP 26AWG*4P		
P1	YUS-01 8P8C 50U"	P2	YS-21 8P8C 50U"
Length	XXM		
Color	YY		