


SATA Cable

Length 150±10MM

Length 300±10MM


Length 700±10MM

Length 1000±10MM

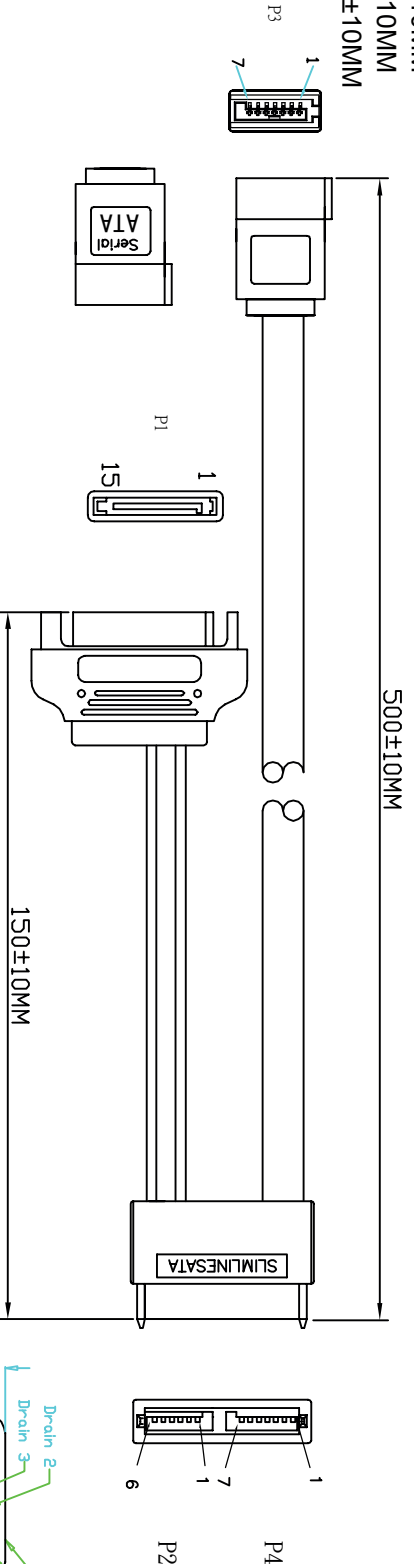

5V only!

PIN OUT

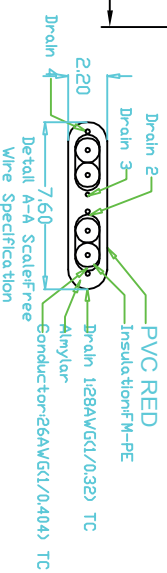

Test Conditions:

High Voltage Test: 300V Volt



Insulation Resistance: 10.0M ohm

Conduction Resistance: 5.0ohm



Features: Finished product to be done 100% of the electrical test,

and without any open circuit/short circuit,

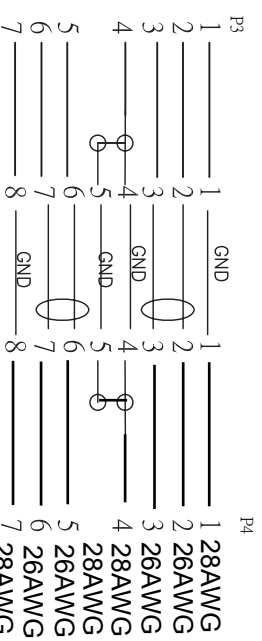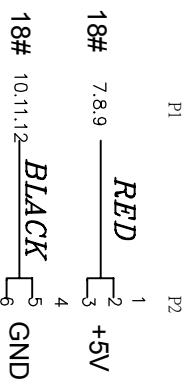mismatch and electrical flash



NO.	Description
A	SATA cable UL2725 26#(4/0.404TC+4/0.32TC)+AL OD:7.5*2.1MM RED
B	Power cable UL 1007 18#(34*0.12TC) red/black
P1	SATA power 15P connector terminal 1U"
P3	SATA 7P male terminal 1U"
P2/P4	Slimln sata 7+6 connector

	
Title: Cable slim SATA female > SATA 7 pin + 2 pin power 100 cm	
Item no.	84792
Barcode	4043619847921
File No.	88031
Unit	mm
Projection	
Rev	A
Dat	2015 / 08 / 03