

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125V AC RMS
- 2. CURRENT RATING : 1.5A mp
- 3. CONTACT RESISTANCE : 100 MILLI OHMS MAX
- 4. INSULATION RESISTANCE : 1000M OHMS MIN @ 500V DC
- 5. DIELECTRIC STRENGTH : 750V AC RMS 60Hz, 1MIN
- 6. CAT. 6A PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 B.2-1

ENVIRONMENTAL:

- 1. STORAGE : -40° TO+85°
- 2. OPERATION : 0° TO+70°
- RJ45 JACK COMPLY TO REQUIREMENTS OF IEC-60603-7-5
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68



MECHANICAL

- 1. RJ45 JACK LIFE: 750 TIMES MIN
- 2. IDN LIFE : 200 TIMES MIN

Accessory:

- 1. Cable Tie (75X1.9mm) X12Pcs
- 2. Instruction Sheet
- 3. expanded screw X 2 Set

MATERIAL LIST:

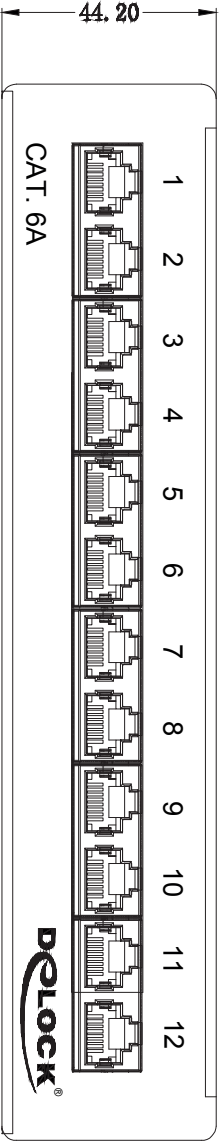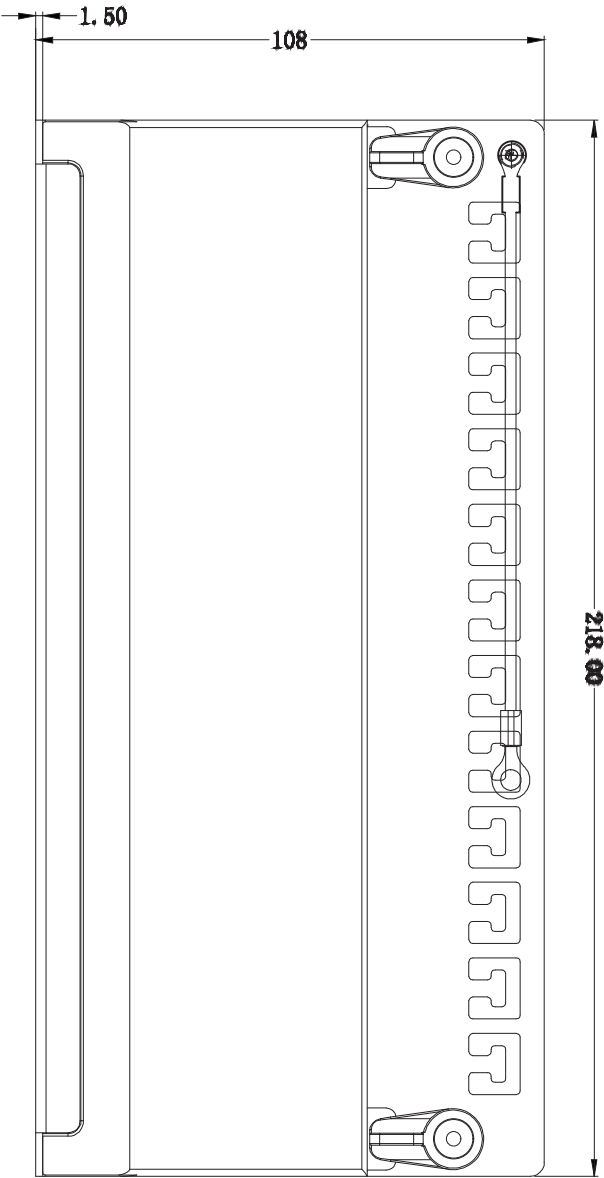

⑦	Upper Panel Cover	1.2mm thickness Metallic Panel with plastic powder cladding	1	
⑥	Bottom Panel :	1.5mm thickness Metallic Panel with plastic powder cladding	1	
⑤	RJ45 Jack :	Housing-Fireproof PBT UL-94V0 Pin-8P8C 3u" gold plated	12	
④	PCB	1.6mm UL 94V0	2	
③	IDC BODY	Fireproof PC/ABS UL-94V0/With Colour Coded Printing T568A/B	12	
②	IDC PIN	Phosphor Bronze & Tinned	96	
①	IDC TERMINAL	For 22-24 AWG Cable	12	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

Title: Desktop Patch Panel 12 Port Cat.6A grey				
we move the world				
DLOCK®		87675		
Dat		2016 / 01 / 11	Item no.	
Unit		mm	Barcode	
Projection			4043619876754	
Rev		A	File No.	
			88220	