


Specification :

Material :

1. Case : ABS, UL 94V-0.
2. Metal Cover : SECC, 0.6mm thickness.
3. RJ45 Jack Housing : PBT+Glass Fiber, UL 94V-0, Black color.
4. Contact Bracket : PBT+Glass Fiber, UL 94V-0, Black color..
5. RJ45 Jack Contact :
 - 5-1. Material : Phosphor Bronze with Nickel plated.
 - 5-2. Finish : 50 micro-inch Gold plated on Plug contact area.
6. RJ45 Jack Shield : Bronze with Nickel plated.
7. IDC :
 - 7-1. IDC Housing : PC+Glass Fiber, UL 94V-2.
 - 7-2. IDC Terminal : Phosphor Bronze with Tin plated.
8. Grounding Plate : SPCC, 1.5mm thickness with Nickel plated.
9. Screw : M2.0x6.0xø3.3mm/M3.5x16.0xø6.0mm.
10. "M" Clip : SPCC, 1.5mm thickness with Nickel plated.
11. PCB : FR4, UL 94V-0

Performance :

- a. T568A & T568B wiring printing on IDC.
- b. Insertion force : 30N max. (IEC 60603-7-5).
- c. Retention strength : 7.7 kg between Jack and Plug.
- d. Operating temperature : -10°C to 60°C. (ISO/IEC 11801, ANSI/TIA/EIA 568C.2)
- e. Life(mating cycles) :
 - *Jack : 750 cycles min. (ISO/IEC 11801, IEC 60603-7-5).
 - *IDC : Suitable for 22-26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tools.
- f. The CAT.6A channel transmission performance is in compliance with TIA/EIA 568C.2 & ISO/IEC 11801 standard.

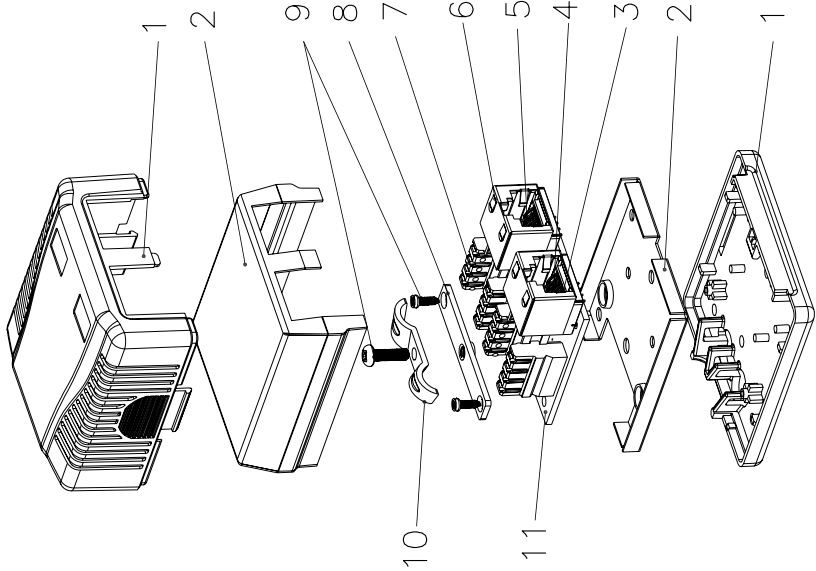

SCALE 1/2



| | | | | | |
|------------|----------------|----------|-------------------------------------|--|--|
| Date | 2016 / 10 / 22 | Title: | Keystone Mounting for enclosures | | |
| Unit | mm | Item no. | 86197 | | |
| Projection | | Barcode | 4043619861972 | | |
| Rev | A | File No. | | | |