

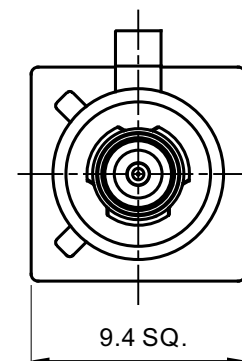


FAKRA K jack

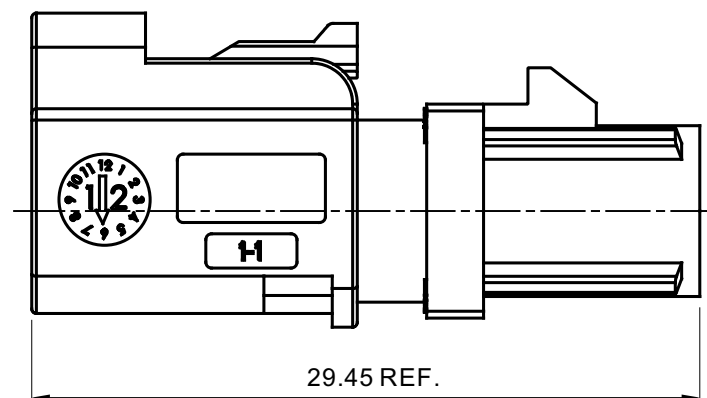

FAKRA D plug

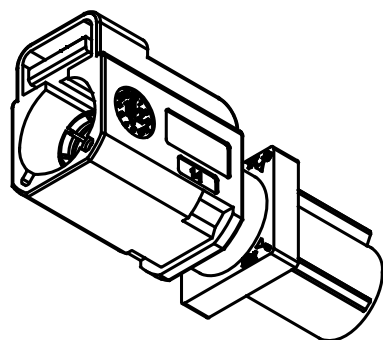

8	Ring	BeCu	None
7	Shell	PA66	RAL 1027 Curry
6	Insulator	PTFE	White
5	Body	Copper	Nickel
4	Pin	P.B.	Gold
3	Insulator	PTFE	White
2	Body	Copper	Nickel
1	Shell	PA66	RAL 4004 Claret violet
No	Description	Material	Finish

Impedance : 50  $\Omega$   
 Frequency range : 0 - 6 GHz  
 Durability(Matings) : 100 min  
 Plastic housing retention force :  $\geq 110$ N  
 Temperature range : -40°C / +105°C

Date	2018 / 06 / 12	<div> <div> <b>DEL</b><b>OCK</b><sup>®</sup>            we move the world         </div> <div>           Title: Adapter FAKRA K jack &gt; FAKRA D plug         </div> </div>	
Unit	mm		
Projection		Item no.	89855
Rev	A	Barcode	4043619898558