

Delock RP-SMA Jack bulkhead crimping splash proof

Description

This jack is used to connect the components of the high frequency technology.



Item no. 12453

EAN: 4043619124534

Country of origin: Taiwan,
Republic of China

Package: Zip poly bag

Specification

- Connector: RP-SMA jack bulkhead and crimping
- Impedance: 50 Ohm
- For cable diameter: 0.81 - 1.48 mm and RG178
- Thread length outer: ca. 5.54 mm
- Thread length inner: ca. 7.06 mm


System requirements

- Coaxial cable

Package content

- RP-SMA jack
- Nut and washer

Images

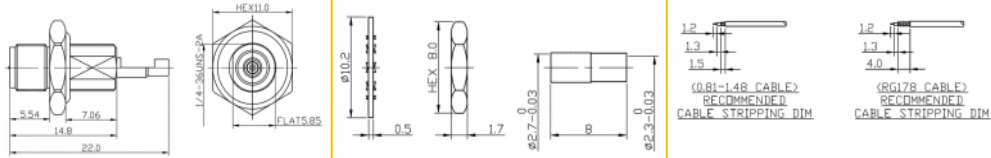

Physical characteristics

For cable diameter from to:	RG178 0.81 mm - 1.48 mm
Thread length outer:	5.54 mm
Thread length inner:	7.06 mm
Connector finishing:	gold-plated
Pin finishing:	gold-plated
Material gasket :	silicone
Material dielectric:	Teflon
Material body:	brass
Material ferrule:	brass
Material pin:	brass
Material nut:	brass
Material washer:	brass