

Delock LTE Antenna SMA plug 1.9 - 2.3 dBi omnidirectional with tilt joint black

Description

This LTE antenna by Delock allows the usage of different LTE bands inside. It is completely compatible to GSM, UMTS, LTE, ZigBee, Z-Wave, NB-IoT, WLAN 2.4 GHz, Bluetooth, ISM, DECT and LoRa.



Item no. 12635

EAN: 4043619126354 Country of origin: Taiwan, Republic of China Package: Retail Box

Specification

- Connector: 1 x SMA plug
- GSM, UMTS, LTE, ZigBee, Z-Wave, NB-IoT, WLAN, Bluetooth, ISM, DECT, LoRa
- Frequency range: 698 - 791 MHz
 824 - 960 MHz
 1710 - 2170 MHz
 2300 - 2700 MHz
- Antenna gain: 1.9 2.3 dBi
- Impedance: 50 Ohm
- VSWR: 2.5 4.0
- Polarisation: linear, vertical
- Operating temperature: -10 °C ~ 55 °C
- Housing material: ABS
- Colour: black
- Dimensions (LxWxH): ca. 231.10 x 21.60 x 5.50 mm

System requirements

© 2024 by Delock. All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.




• Device with a free SMA connector

Package content

• Antenna

Images

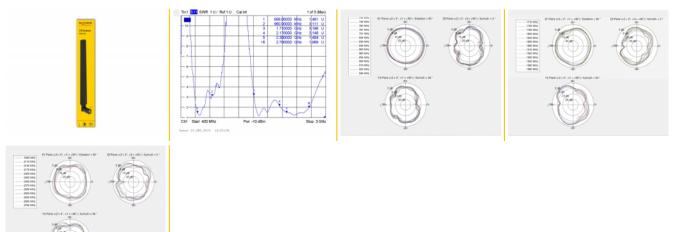



DATASHEET



General

| Mounting type: | Screw mounting |
|----------------------|----------------|
| Suitable for indoor: | yes |
| | |

Interface

Technical characteristics

| Frequency range: | 824 MHz - 960 MHz 698 MHz - 791 MHz 2300 MHz - 2700 MHz 1710 MHz - 2170 MHz |
|------------------------|--|
| Antenna gain: | 1.9 - 2.3 dBi |
| Impedance: | 50 Ω |
| Operating temperature: | -10 °C ~ 55 °C |
| Polarisation: | linear vertical |
| VSWR: | 3,0 - 6,0 |

Physical characteristics

| Housing colour: | black |
|-------------------------|----------|
| Housing material: | ABS |
| Width: | 2.16 cm |
| Height: | 0.5 cm |
| Length with tilt joint: | 23.10 cm |