


Delock Riser Card PCI Express x1 > 2 x PCIe x1 with 30 cm USB cable

Description

The PCI Express riser card by Delock can be plugged into any PCI Express x1 slot on the motherboard. The PCI Express board can be mounted in a different position in the case. This allows up to two PCIe cards to be operated in each PCIe slot of a motherboard.

Note

The package content includes a USB 3.0 riser cable with a length of 30 cm. No USB signals are transmitted through this cable, therefore it is not possible to exchange it with a different or longer cable.

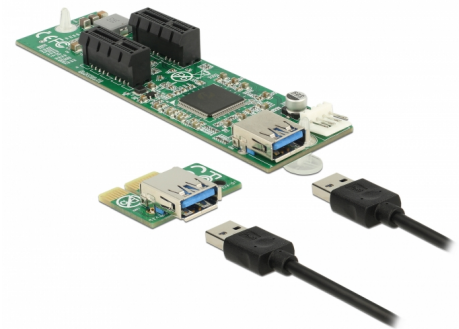

Item no. 41433

EAN: 4043619414338

Country of origin: China

Package: Retail Box

Specification

- Connectors:
 - Motherboard side:
 - 1 x PCI Express x1
 - 1 x USB 3.0 Type-A female
 - Riser side:
 - 2 x PCI Express x1 slot
 - 1 x USB 3.0 Type-A female
 - 1 x Floppy 4 pin power plug
- Chipset: Pericom PI7C9X2G
- Cable data:
 - 1 x riser cable USB 3.0 Type-A male to male ca. 30 cm (incl. connectors)
 - 1 x power cable Floppy to Molex ca. 15 cm (incl. connectors)
- Dimensions of the riser card (LxWxH): ca. 120 x 34 x 15 mm

System requirements




- Linux Kernel 2.6.38 or above

- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express x1 / x4 / x8 / x16 / x32 slot
- Power supply with a free Molex power connector

Package content

- PCIe to USB riser card
- USB to PCIe riser card
- 1 x USB 3.0 cable
- 1 x Power cable

Images



General

Supported operating system:	Linux Kernel 2.6.38 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
-----------------------------	--

Physical characteristics

Length:	120 mm
Width:	34 mm
Height:	15 mm