


# Delock 3.5" Mobile Rack for 1 x 2.5" SATA / SAS HDD / SSD with vibration protection

## Description

This solid metal mobile rack by Delock can be installed into a free 3.5" bay of a PC and ensures a 360° vibration protection against horizontal and vertical vibrations through the built-in rubber bumpers. A 2.5" SATA or SAS hard drive can be screwed into the frame. For operation with a SAS drive, a SAS controller is required. The mobile rack is equipped with a key lock to prevent unauthorised access. The hot swap function allows the exchange of the hard disk drive during operation. Furthermore the SATA plug on the outside of the device has a locking port, which will ensure the SATA cables click into place, and are protected against vibrations. The mobile rack can be used wherever the PC is subject to vibrations. As an additional inner tray for the fast hard disk change the item [47229 by Delock](#) is available.

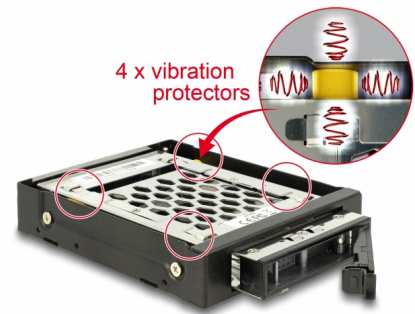

**Item no. 47228**

EAN: 4043619472284

Country of origin: China

Package: Retail Box

## Special features

- „360° vibration protection“ against horizontal and vertical vibrations

## Specification

- For installation into an available 3.5" bay
- Connectors:  
inside:  
1 x SATA 6 Gb/s / SAS 12 Gb/s 29 pin receptacle  
outside:  
1 x SATA 6 Gb/s 22 pin plug with locking port
- Suitable for 2.5" SATA / SAS HDD / SSD:  
HDD height up to 15 mm  
supports 5 V HDD / SSD
- Data transfer rate:  
SATA up to 6 Gb/s  
SAS up to 12 Gb/s

- With key lock
- Hot Swap
- OS independent, no driver installation necessary

## System requirements

- PC with one free 3.5" bay
- A free SATA / SAS port

## Package content

- 3.5" mobile rack
- 2.5" mobile rack inner tray
- 1 x cable SATA 22 pin receptacle with metal clip > SATA 15 pin plug and SATA 7 pin receptacle, ca. 30 cm
- 1 x cable SATA 7 pin receptacle with metal clip > SATA 7 pin receptacle with metal clip, ca. 50 cm
- 2 x keys
- 4 x rack screws
- 4 x hard drive screws
- User manual

## Images



## General

Form factor:	3.5"
Suitable for data medium:	2.5" SSD or HDD height up to 15.0 mm
Supported operating system:	OS independent, no driver installation necessary

## Interface

External:	1 x SATA 6 Gb/s 22 pin plug with locking port
Internal:	1 x SATA 6 Gb/s 22 pin receptacle

## Technical characteristics

Data transfer rate:	SAS bis zu 12 Gb/s SATA up to 6 Gb/s
---------------------	---

## Physical characteristics

Colour:	black
---------	-------