

Delock SATA 6 Gb/s DOM Module 32 GB MLC SATA Pin 8 power -40 $^{\circ}$ C \sim 85 $^{\circ}$ C


Description

This SATA DOM module by Delock is especially suitable for use in indutrial PCs und Server.


The module has an extended temperature range of -40 $^{\circ}$ C $^{\sim}$ 85 $^{\circ}$ C and is designed for use in harsh operating conditions.

Advantage: No additional power supply is required as power is provided via the SATA pin 8 connector. To use this application, a motherboard with SATA pin 8 connector is needed. The SATA pin 8 connector on the motherboard is of yellow colour. If no SATA pin 8 connector is available, this module can also be used via the standard SATA connector. For this purpose, the power supply is provided via the 3 pin power connector.

Schematic representation for SATA Pin 8

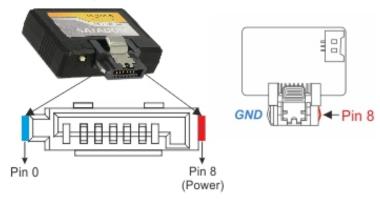

Standard power supply

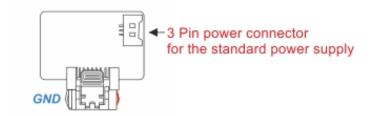





Item no. 54779

EAN: 4043619547791

Country of origin: Taiwan,

Republic Of China

Package: Antistatic cover



Specification

• Capacity: 32 GB

Interface: SATA 6 Gb/sSupports SATA pin 8 power

Chip: ToshibaFlash type: MLC

• Maximum performance: 270 MB/s read, 45 MB/s write

• Maximum write cycles: 3000

Maximum power consumption: 2.39 W (5 V x 478 mA)

Write protect: yesATA security: yesS.M.A.R.T.: yesThermal sensor: yes

• Dimensions (width x length x height): 37.17 x 31.50 x 10.20 mm

Vibration: 20G @ 7 ~ 2000 Hz
Shock: 1500G @ 0.5 ms

• MTBF: >3 million hours

• Operation temperature: Industrial grade -40 °C ~ 85 °C

• Storage temperature: -55 °C ~ 95 °C

System requirements

• A free SATA 8 pin or SATA 7 pin connector

• For SATA 7 pin: power supply with a free 4 pin power connection


Package content

- SATA DOM module
- Power cable

Images











Technical characteristics

| Chipset: | Toshiba |
|----------------------------|--------------------|
| Storage temperature: | -55°C - 95°C |
| Read: | 270 MB/s |
| Maximum power consumption: | 2.39 W |
| Maximum write cycles: | 3000 |
| MTBF: | 3 million hours |
| Interface: | SATA 6.0 Gb/s |
| Shock: | 1500 G @ 0.5 ms |
| Write: | 45 MB/s |
| Write protect: | yes |
| Capacity: | 32 GB |
| Thermal sensor: | yes |
| Vibration: | 20 G @ 7 ~ 2000 Hz |
| Password protection: | Yes |

Physical characteristics

| Length: | 31.50 mm |
|---------|----------|
| Width: | 37.17 mm |
| Height: | 10.20 mm |