

Delock Adapter HDMI female to USB Type-C™ male (DP Alt Mode) 4K with PD 100 W

Description


This adapter by Delock enables the connection of a **USB Type-C™** (DisplayPort Alternate Mode) monitor to a free **HDMI** interface of a PC or laptop.

Ideal for portable USB-C™ monitor

The adapter allows the connection of a **portable monitor** to an HDMI interface and power the monitor at the same time. Therefore it is required to connect a power supply to the adapter, which corresponds to the input power of the monitor.

USB Power Delivery (USB PD 3.0) support up to 100 watt

The adapter has a **USB Type-C™ Power Delivery port**. If a power supply is connected to this port, the device which is connected to the USB-C™ male port will be charged with up to 100 watts during operation.

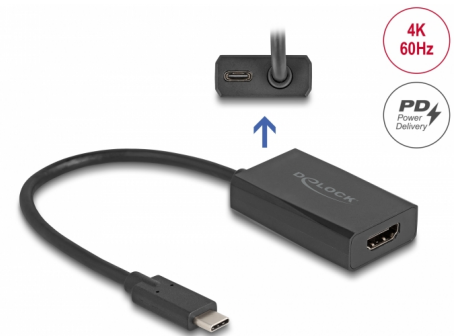

Item no. 61058

EAN: 4043619610587

Country of origin: China

Package: Retail Box

Specification

- Connectors:
 - Input:
 - 1 x HDMI female
 - 1 x USB Type-C™ female (power supply)
 - Output: 1 x USB Type-C™ male
- Chipset: Lontium LT6711A
- DisplayPort 1.2 and High Speed HDMI specification
- Signal direction: HDMI input > USB Type-C™ output
- Resolution up to 3840 x 2160 @ 60 Hz (depending on the system and the connected hardware)
- Transmission of audio and video signals
- Supports HDCP 1.4 and 2.3
- Colour: black
- Cable length without connectors: ca. 15 cm

System requirements

- A free HDMI connector
- Monitor with a free USB Type-C™ (DP Alt Mode) interface
- Power supply

Package content

- Adapter HDMI to USB Type-C™
- User manual

Images



Interface

| | |
|---------|--|
| Output: | 1 x USB Type-C™ male |
| Input: | 1 x USB Type-C™ female (power supply) 1 x HDMI female |

Technical characteristics

| | |
|----------------------------|---------------------|
| Chipset: | Lontium LT6711A |
| Maximum screen resolution: | 3840 x 2160 @ 60 Hz |

Physical characteristics

| | |
|---------------|-------|
| Cable length: | 15 cm |
| Colour: | black |