


Delock Adapter USB 2.0 Tip-A muški > 1 x serijski RS-232 DB9 muški s vijcima i maticama ESD zaštite

Opis

Ovaj USB 2.0 na RS-232 prilagodnik tvrtke Delock omogućava prilagodljivo DB9 spajanje odgovarajućim vijcima i maticama za rad na serijskim upravljačima, pisačima, mjernim instrumentima, IoT uređajima, itd. Ugrađena ESD zaštita sprječava uništavanje elektroničkih komponenti.

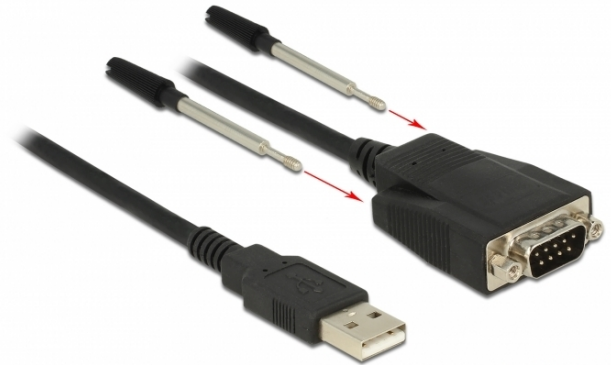

ca. 1,3 m

Tehnički podaci

- Priključak:
 - 1 x USB 2.0 Tip-A muški
 - 1 x serijska muška RS-232 DB9
- Skup čipova: Prolific PL2303 HXD
- Serijski spojnik s vijcima ili maticama
- Vrsta vijka: #4-40 UNC
- Kompatibilan s USB 3.0, USB 2.0, i USB 1.1 pune brzine 12 Mbps
- Brzina prijenosa podataka do 230,4 Kb/s
- Signali: TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
- Paritet parni, neparni, nijedan, oznaka, prazno mjesto
- Stop bit: 1, 1,5, 2
- Podatkovni bit: 5, 6, 7, 8
- Kontrola protoka: nema, Xon/Xoff, RTS/CTS
- FIFO: 16 bajtni međuspremnik dvosmjerni
- ESD zaštita:
 - ±15 KV ESD model ljudskog tijela (HBM)
 - ±15 KV IEC1000-4-2 praznina za pražnjenje
 - ±8 KV IEC1000-4-2 kontaktno pražnjenje
- Duljina kabela: oko 120 cm
- Duljina kabela zajedno s priključkom: oko 130 cm
- Radna temperatura: 0 °C ~ 60 °C
- Vlažnost: 5 ~ 95 %

Preduvjeti sustava

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 3.3
- Osobno ili prijenosno računalo sa slobodnim USB Tipa-A priključkom

Sadržaj pakiranja

- USB 2.0 na 1 x serijski adapter
- 2 x vijka
- CD s upravljačkim programom
- Korisnički priručnik

Predmet br. 62955

EAN: 4043619629558

Zemlja podrijetla: China

Pakiranje: Retail Box





Slike





General	
Function:	Plug & Play
Specification:	RS-232 (EIA / TIA) USB 1.1 USB 2.0
Supported operating system:	Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit Linux Kernel 3.3 o superiore
Interface	
Connettore 1:	1 x USB 2.0 Type-A male
Connettore 2:	1 x Serial RS-232 DB9 male
Technical characteristics	
Chipset:	Prolific PL2303HXD
Data transfer rate:	up to 230.4 Kb/s
FIFO:	16 byte
Temperatura di esercizio:	0 °C ~ 60 °C
Humidity:	5 ~ 95 %
Signal transmission:	TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
Data transmission:	asynchronous full duplex
Physical characteristics	
Cable length:	1.2 m
Cable length incl. connector:	1.3 m
Tipo di vite:	#4-40 UNC
Colour:	nero
Overvoltage protection:	± 15 KV ESD Schutz Human Body Model (HBM) ± 15 KV IEC1000-4-2 Air Gap Discharge ± 8 KV IEC1000-4-2 Contact Discharge