

# Delock Combo Converter for M.2 NVMe PCIe or SATA SSD with USB 3.2 Gen 2

## Description


This converter by Delock enables the installation of an **M.2 PCIe NVMe SSD or SATA M.2 SSD** in **2280, 2260, 2242 and 2230** format, it can be connected via USB to the PC or laptop.

### Combo converter

The big advantage of this Delock M.2 converter is that both SATA and PCIe (NVMe) M.2 SSDs can be inserted into the converter. The **memory is automatically recognized by the chipset** and can then be used.

### Ideal test equipment

Due to the USB-A connector and the **direct installation of the SSD** on the board, without enclosure, the Delock converter is most suitable as test equipment.

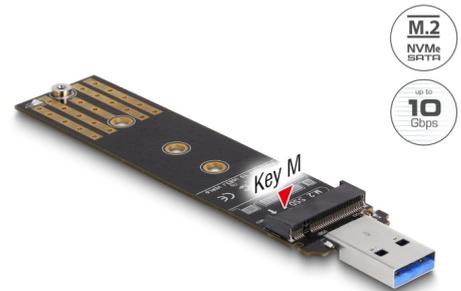

**Item no. 64197**

EAN: 4043619641970

Country of origin: China

Package: Retail Box

## Specification

- Connectors:
  - 1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Type-A male
  - 1 x 67 pin M.2 key M slot
- Chipset: Realtek RTL9210B
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on SATA or PCIe (NVMe)
- Supports NVM Express (NVMe)
- Data transfer rate up to 10 Gbps
- LED indicator for power and access
- Bootable
- Dimensions (LxWxH): ca. 110 x 22 x 6 mm
- Plug & Play

## System requirements

- Android 11.0 or above
- Chrome OS
- Linux Kernel 5.13 or above
- Mac OS 12.3.1 or above
- Windows 8.1/8.1-64/10/10-64/11
- PC or laptop with a free USB Type-A port

---

## Package content

- M.2 converter
- Mounting material
- Screwdriver
- User manual

---

## Images



## General

Function:	NVM Express (NVMe) Plug & Play bootable
Supported operating system:	Chrome OS Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11 Linux Kernel 5.13 or above Mac OS 12.3.1 or above Android 11.0 or above
LED indicator:	power and activity
Slot:	PCIe SATA
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on SATA or PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

## Interface

Connector 1:	1 x USB 10 Gbps Type-A male (host)
Connector 2:	1 x 67 pin M.2 key M slot

## Technical characteristics

Chipset:	Realtek RTL9210B
Data transfer rate:	10 Gbps