


Delock Adapter USB 2.0 Tip-A muški > 1 x serijski RS-232 DB9 prošireni temperaturni raspon

Opis

Ovaj USB Tip-A na serijski adapter tvrtke Delock omogućava RS-232 ulaz za mjerače, POS sustave, pisače, modeme, IoT uređaje, itd. te ispunjava zahtjeve za prošireni temperaturni raspon od -40 °C do 85 °C.

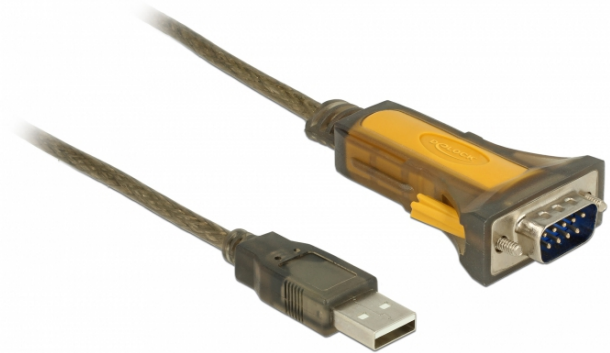

-40°C +85°C

ca. 1,5 m

Tehnički podaci

- Priključak:
 - 1 x USB 2.0 Tip-A muški >
 - 1 x serijska muška RS-232 DB9 s vijcima
- Skup čipova: FTDI FT232
- Vrsta vijka: #4-40 UNC
- Kompatibilan s USB 2.0, i USB 1.1 pune brzine 12 Mbps
- Brzina prijenosa podataka do 460,8 Kb/s
- Signali: TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
- Paritet parni, neparni, nijedan, oznaka, prazno mjesto
- Stop bitova: 1, 2
- Podatkovnih bitova: 7, 8
- Kontrola protoka: nema, Xon/Xoff, RTS/CTS
- FIFO: 128 Bajta - RX
- FIFO: 256 bajta - TX
- Struja potrošnje: oko 20 mA
- Prošireni temperaturni raspon: -40 °C ~ 85 °C
- Duljina kabela zajedno s priključkom: oko 1,5 m

Preduvjeti sustava

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.4, Mac ex OS 10.9
- Osobno ili prijenosno računalo sa slobodnim USB Tip-A priključkom

Sadržaj pakiranja

- USB 2.0 na 1 x serijski adapter
- CD s upravljačkim programom
- Korisnički priručnik

Predmet br. 65840

EAN: 4043619658404

Zemlja podrijetla: China

Pakiranje: Retail Box



Slike





General	
Function:	Plug & Play
Specification:	USB 1.1 USB 2.0
Supported operating system:	Mac OS 10.9 o superiore Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit Linux Kernel 2.4 o superiore
Interface	
Connettore 1:	1 x USB 2.0 Type-A male
Connettore 2:	1 x Serial RS-232 DB9 male
Technical characteristics	
Chipset:	FTDI 232R
Data transfer rate:	up to 460,8 Kbps
FIFO:	128 byte 256 Byte
Temperatura di esercizio:	-40 °C ~ 85 °C
Shielding:	shielded
Data transmission:	asynchronous Bi-directional
Current consumption:	20 mA
Physical characteristics	
Cable length incl. connector:	1,5 m
Colour:	giallo / nero