


# Delock SMC jack PCB

## Description

This adapter by Delock is suitable for connecting components of radio frequency technology.

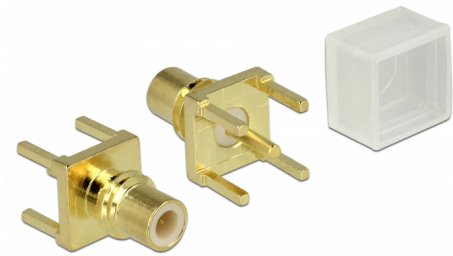

**Item no. 65850**

EAN: 4043619658503

Country of origin: China

Package: Zip poly bag

## Specification

- Connector: 1 x SMC jack PCB
- Housing material: brass gold plated
- Impedance: 50 Ohm
- Frequency range: DC - 6 GHz
- VSWR: 1.3 / 3 GHz
- Operating temperature: -55 °C ~ 155 °C
- Length: ca. 11.8 mm



## System requirements

- Device with a free SMC port

## Package content

- RF Adapter

## Images



## Interface

connector:	1 x SMC jack PCB
------------	------------------

## Technical characteristics

Frequency range:	DC - 6 GHz
Impedance:	50 $\Omega$
Operating temperature:	-55 °C ~ 155 °C
VSWR:	1.3 / 3 GHz

## Physical characteristics

Housing material:	brass gold plated
Length:	11.8 mm