


# Delock Terminal block for PCB soldering version 3 pin 5.00 mm pitch vertical 10 pieces

## Description

This terminal block by Delock is suitable for the mounting on a PCB. This can be soldered on a board, to create a screw connection. Furthermore, data or power cables can be connected via the terminal block.

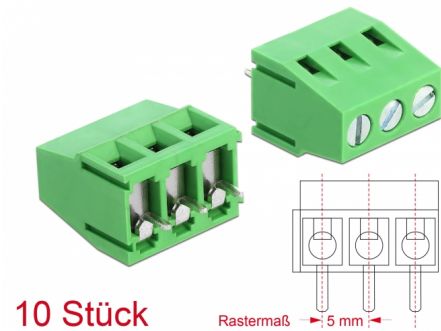

**Item no. 66018**

EAN: 4043619660186

Country of origin: China

Package: Zip poly bag

## Specification

- Connectors:
  - 1 x 3 pin terminal block screw terminal
  - 1 x 3 soldering pin
- Pitch: 5.00 mm
- Environmental temperature: -40 °C ~ 105 °C
- Useable for a cable gauge from 24 to 14 AWG
- Withstanding voltage: AC 2000 V / 1 min
- Rated voltage according to: UL: 300 V, IEC: 250 V
- Rated current according to: UL: 10 A, IEC: 24 A
- Insulation resistance: 500 MΩ / DC 500 V
- Material: plastic
- Colour: green
- Dimensions (LxWxH): ca. 17.0 x 15.0 x 12.0 mm

## Package content

- 10 x Terminal block

Technical drawings of the Lötanschluss (solder connection) component. The left drawing shows a top view of the component with three circular solder pads and a central mounting hole. The right drawing shows a side view of the component, highlighting the green plastic housing and the red and black wires. Dimensions are provided for both views.

## General

Suitable for conductor gauge:	24 - 14 AWG
Mounting type:	Soldering

## Interface

Connector 1:	1 x 3 pin terminal block screw terminal
Connector 2:	1 x 3 soldering pin

## Technical characteristics

Storage temperature:	-40 °C ~ 105 °C
Resistor:	500 MΩ / DC 500 V

## Physical characteristics

Pitch distance:	5 mm
Housing material:	Plastic
Length:	17.0 mm
Width:	15.0 mm
Height:	12.0 mm
Colour:	green