




Delock Terminal block for PCB soldering version 2 pin 6.35 mm pitch vertical 10 pieces

Description

This terminal block by Delock is suitable for the mounting on a PCB. This can be soldered on a board, to create a screw connection. Furthermore, data or power cables can be connected via the terminal block.

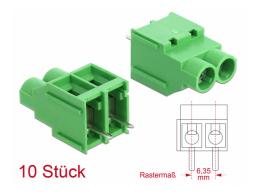

Item no. 66019

EAN: 4043619660193 Country of origin: China Package: Zip poly bag

Specification


- Connectors:
 - 1 x 2 pin terminal block screw terminal
 - 1 x 2 soldering pin
- Pitch: 6.35 mm
- Environmental temperature: -40 °C ~ 105 °C
- Useable for a cable gauge from 26 to 10 AWG
- Withstanding voltage: AC 3000 V / 1 min
- Rated voltage according to: UL: 300 V, IEC: 450 V
- Rated current according to: UL: 30 A, IEC: 41 A
- Insulation resistance: 500 M Ω / DC 500 V
- · Material: plastic
- Colour: green
- Dimensions (LxWxH): ca. 21.5 x 13.0 x 12.7 mm

Package content

• 10 x Terminal block



Images

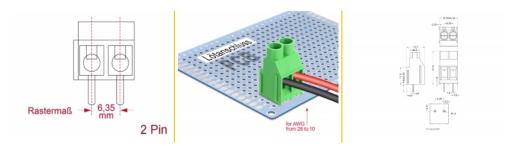



General

| Suitable for conductor gauge: | 26 - 10 AWG |
|-------------------------------|-------------|
| Mounting type: | Soldering |

Interface

| Connector 1: | 1 x 2 pin terminal block screw terminal |
|--------------|---|
| Connector 2: | 1 x 2 soldering pin |

Technical characteristics

| Storage temperature: | -40 °C ~ 105 °C |
|----------------------|-------------------|
| Resistor: | 500 MΩ / DC 500 V |

Physical characteristics

| Pitch distance: | 6.35 mm |
|-------------------|---------|
| Housing material: | Plastic |
| Length: | 21.5 mm |
| Width: | 13.0 mm |
| Height: | 12.7 mm |
| Colour: | green |