

Delock DIP sliding switch 10-digit 2.54 mm pitch THT vertical blue 10 pieces

Description


This DIP sliding switch by Delock is suitable for the through-hole mounting on a PCB.

THT Assembly Technology

The attached soldering pins on the DIP switch can be inserted through contact holes on a PCB and soldered from the bottom side. The switching rows are used to set configurations and to change parameters.

Multifunctional application

The DIP switch is mainly used in telecommunications, computers and measuring.

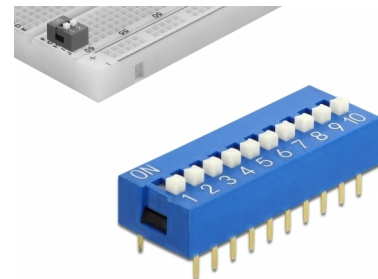

10 x

Item no. 66103

EAN: 4043619661039

Country of origin: China

Package: Tube



Specification

- Connectors:
2 x 10 soldering pin
- Number of positions: 10
- Pitch: 2.54 mm
- Switch position: on / off
- Switching rating: 25 mA, 24 VDC
- Insulation resistance: 100 MΩ / 500 VDC
- Withstanding voltage: 300 VAC / 1 minute
- Soldering temperature: 250 °C for ca. 3 - 5 seconds
- Environmental temperature: -40 °C ~ 85 °C
- Operating temperature: -20 °C ~ 85 °C
- Material: plastic
- Colour: blue
- Dimensions (LxWxH): ca. 26.8 x 9.9 x 5.6 mm

Package content

- 10 x DIP sliding switch

Images



General

| | |
|----------------|-----------|
| Mounting type: | Soldering |
|----------------|-----------|

Interface

| | |
|------------|----------------------|
| connector: | 2 x 10 soldering pin |
|------------|----------------------|

Technical characteristics

| | |
|------------------------|------------------|
| Storage temperature: | -40 °C ~ 85 °C |
| Operating temperature: | -20 °C ~ 85 °C |
| Resistor: | 100 MΩ / 500 VDC |

Physical characteristics

| | |
|-----------------|----------|
| Pitch distance: | 2.54 mm |
| Material: | Plastic |
| Length: | 26.8 mm |
| Width: | 9.9 mm |
| Height: | 5.6 mm |
| Switch: | On / Off |
| Colour: | blue |