

Delock Shield Clamp for Busbar - Cable diameter 20 - 35 mm

Description

With this shield clamp by Delock a cable with a diameter of 20 - 35 mm can be attached to a 10 mm busbar. The clamp can also be used as an EMC shield. In this case, unwanted electrical or electromagnetic effects are dissipated from the busbar.

Application

The cable clamp can be tightened with the thumbscrew or a slotted screwdriver so that the cable is firmly clamped.



Item no. 66452

EAN: 4043619664528

Country of origin:
Germany

Package: Zip poly bag

Specification

- Busbar mounting: 10 mm
- Cable diameter:
min.: 20 mm
max.: 35 mm
- Material: metal
- Dimensions (LxWxH): ca. 107 x 41 x 20 mm


System requirements

- Busbar 10 mm

Package content

- Shield clamp

Images

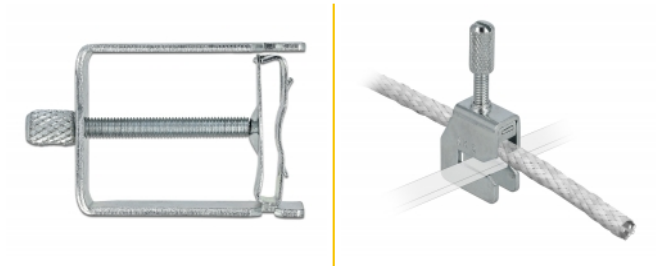

General

Mounting type:	Busbar mounting: 10 mm
----------------	------------------------

Physical characteristics

Material:	metal
Length:	107 mm
Width:	41 mm
Height:	20 mm
Cable diameter:	min.: 20 mm max.: 35 mm