

Delock Z-Wave® Door / Window Contact Sensor with Magnet

Opis

This Delock sensor is compatible to the Z-Wave® standard and can be connected to a Z-Wave® gateway smoothly. The sensor serves for the recognition if e.g. a door or window is open or not. It can send a signal if the sensor body is separated from the magnet.



Predmet br. 78008

EAN: 4043619780082

Zemlja podrijetla: China

Pakiranje: Kutija

Tehnički podaci

- Z-Wave® compatible sensor
- Frequency: 868.42 MHz
- Z-Wave® 500 series
- Power supply:
battery or
external DC power supply 9 ~ 30 V
- Suitable for interior use
- Distance from magnet to detector: max. 10 mm
- Power consumption:
Operating: 32.7 mA
Sleeping mode: 0.023 mA
- Operating distance: ca. 30 m
- Operating temperature: 0 ~ 40 °C
- LED indicator
- TMP button
- Dimension (LxWxH):
Detector: ca. 78 x 19 x 18 mm
Magnet: ca. 30 x 12 x 10 mm


Preduvjeti sustava

- Z-Wave® gateway

Sadržaj pakiranja

- Z-Wave® door / window contact sensor
- Battery (1/2 AA) 3.6 V / 1200 mAh
- 4 screws
- User manual

Slike

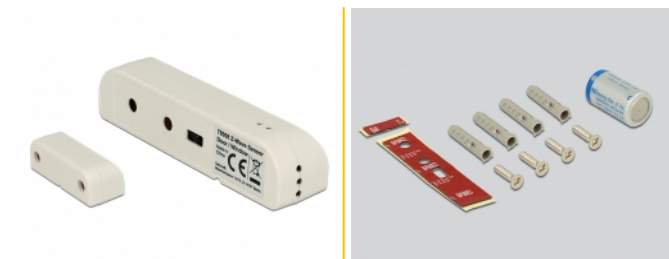

General

Suitable for indoor:	Yes (Da)
----------------------	----------

Technical characteristics

Frequency range:	Z-Wave 868,42 MHz
Radna temperatura:	0 °C ~ 40 °C
Operating range:	ca. 30 m
Napon:	Battery or external DC power supply 9 ~ 30 V
Current consumption:	Operating: 32.7 mA Sleeping mode: 0.23 mA