


Delock Slot bracket 1 x 19 pin USB 3.1 pin header female internal > 1 x USB Type-C™ female + 1 x USB Type-A female external

Description

This slot bracket by Delock expands the PC by one external USB Type-C™ port and one USB Type-A port. The cable of the slot bracket can be connected internally to the motherboard with a 19 pin USB 3.1 pin header. Thus the internal connection will be lead outside, in order to connect devices with USB Type-C™ and USB Type-A connector to the computer.

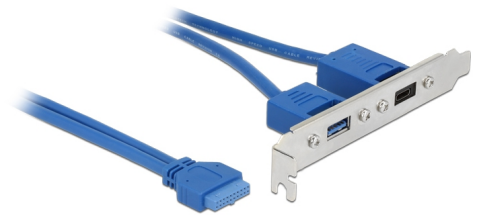

ca. 30 cm

Note

For the connection of two USB devices at once, which need more than 750 mA each, an additional power supply is necessary.

Item no. 84930

EAN: 4043619849307

Country of origin: China

Package: Zip poly bag

Specification

- Connector:
 - internal:
 - 1 x 19 pin SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) pin header female
 - external:
 - 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female
 - 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) Type-A female
- Pitch distance: 2.00 mm
- Screw type: M3
- Cable gauge:
 - 28 AWG data line
 - 24 AWG power line
- Cable diameter: ca. 5.5 mm
- Data transfer rate up to:
 - SuperSpeed USB 10 Gbps,
 - SuperSpeed USB 5 Gbps,
 - Hi-Speed 480 Mbps,
 - Full-Speed 12 Mbps,

Low-Speed 1.5 Mbps

- Backward compatible to 19 pin USB 3.0 pin header with a data transfer rate of up to 5 Gbps
- Power output: max. 1.5 A
- Voltage: 5 V
- Slot bracket: standard
- Cable colour: blue
- Cable length incl. connector: ca. 30 cm

System requirements

- PC with one free slot
- Mainboard with a free 19 pin USB 3.1 pin header male

Package content

- Slot bracket

Images



Interface

External:	1 x USB 10 Gbps USB Type-C™ female 1 x USB 10 Gbps Type-A female
Internal:	1 x 19 pin USB 5 Gbps pin header female

Technical characteristics

Data transfer rate:	SuperSpeed USB 10 Gbps
---------------------	------------------------

Physical characteristics

Pitch distance:	2.00 mm
Cable colour:	blue
Cable length:	30 cm
Conductor gauge:	28 AWG data line 24 AWG power line
Screw type:	M3
Slot bracket:	standard