

Delock WLAN 802.11 ac/a/h/b/g/n Antenna RP-SMA plug 3 dBi omnidirectional with tilt joint black

Description

This Wireless LAN antenna can be connected to a WLAN device with RP-SMA interface, in order to send and receive signals.

Bluetooth



RP-SMA

Item no. 88461

EAN: 4043619884612

Country of origin: Taiwan,
Republic of China

Package: Retail Box

Specification

- Connector: RP-SMA plug
- Frequency range:
2.400 - 2.500 GHz
5.150 - 5.875 GHz
- Antenna gain: 3 dBi
- Impedance: 50 Ohm
- Polarisation: linear, vertical
- VSWR: 2.0
- Operating temperature: -10 °C ~ 55 °C
- Housing material: ABS
- Colour: black
- Length:
ca. 158.40 mm (with tilt joint)
ca. 125.90 mm (without tilt joint)
- Diameter:
ca. 7.40 mm (top)
ca. 13.15 mm (RP-SMA)


System requirements

- Device with a free RP-SMA jack

Package content

- WLAN antenna

Images

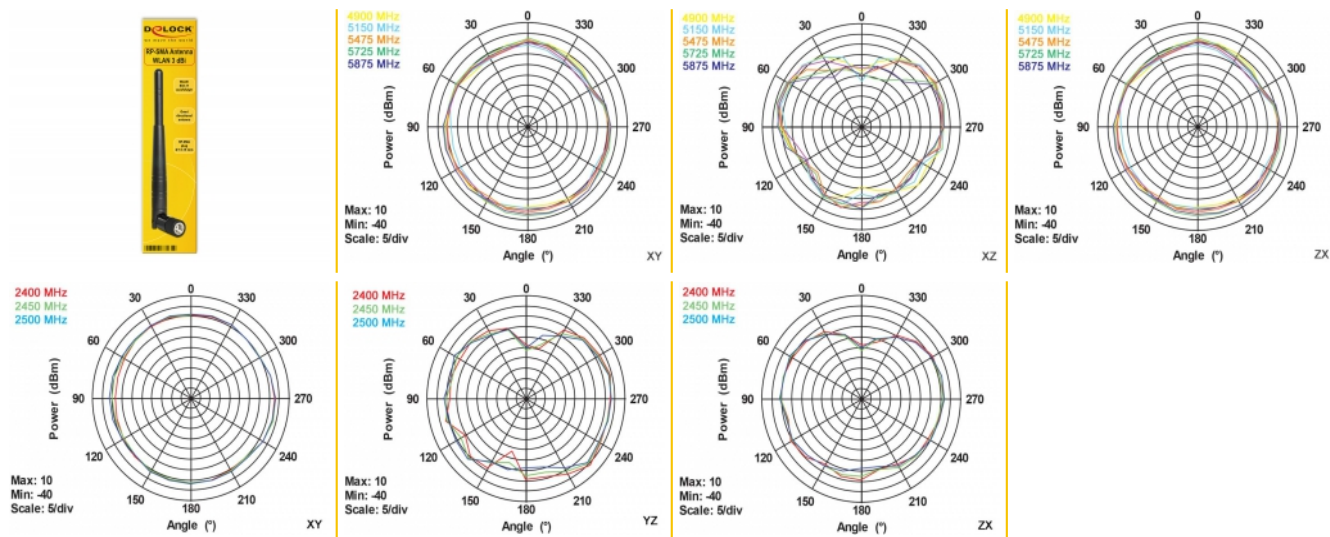

Interface

| | |
|------------|-------------|
| connector: | RP-SMA plug |
|------------|-------------|

Technical characteristics

| | |
|------------------------|--|
| Frequency range: | 2.400 - 2.500 GHz 5.150 - 5.875 GHz |
| Gain: | 3 dBi |
| Impedance: | 50 Ω |
| Operating temperature: | -10 °C ~ 55 °C |
| Polarisation: | linear vertical |
| VSWR: | 2.0 |

Physical characteristics

| | |
|----------------------------|-----------|
| Housing material: | ABS |
| Diameter: | 7.40 mm |
| Diameter connector: | 13.15 mm |
| Length with tilt joint: | 158.40 mm |
| Length without tilt joint: | 125.90 mm |
| Colour: | black |