


# Delock PCI Express x8 Card to 2 x external SuperSpeed USB 20 Gbps (USB 3.2 Gen 2x2) USB Type-C™ female - Low Profile Form Factor

## Description

This PCI Express card by Delock expands the PC by two external USB 3.2 ports. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the card.

### SuperSpeed USB 20 Gbps

The card allows a data transfer rate of **20 Gbps on the USB-C™** port.

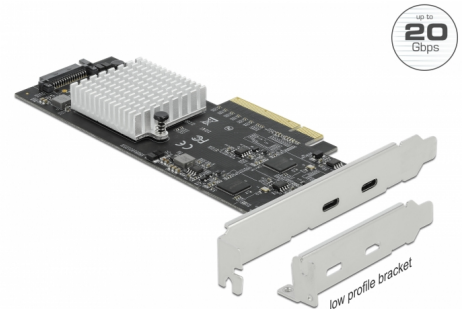

**Item no. 89009**

EAN: 4043619890095

Country of origin: China

Package: Box

## Technical details

- Connectors:
  - external:
    - 2 x SuperSpeed USB 20 Gbps (USB 3.2 Gen 2x2) USB Type-C™ female
  - internal:
    - 1 x PCI Express x8, V2.0
    - 1 x SATA 15 pin power connector
- Chipset: Asmedia ASM3242, ASM1824
- Data transfer rate up to:
  - SuperSpeed USB 20 Gbps,
  - SuperSpeed USB 10 Gbps,
  - SuperSpeed USB 5 Gbps,
  - Hi-Speed 480 Mbps,
  - Full-Speed 12 Mbps,
  - Low-Speed 1.5 Mbps
- Downwards compatible to USB 3.0, USB 2.0, USB 1.1
- Power supply via PCI Express interface or via SATA 15 pin power connector
- Electrical power per port: max. 15 watt (5 V / 3 A)

- Bootable
- Supports UASP
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Supports Multiple INs

---

## System requirements

- Linux Kernel 3.12 or above
- Windows 8.1/8.1-64/10/10-64
- Windows Server 2019
- PC with one free PCI Express x8 / x16 / x32 slot

---

## Package content

- PCI Express card SuperSpeed USB 20 Gbps
- Low profile bracket
- User manual

---

## Images



## General

|                             |  |
|-----------------------------|--|
| Form factor:                | Low Profile  |
| Function:                   | bootable   |
| Supported operating system: | Linux Kernel 3.12 or above<br>Windows 10 32-Bit<br>Windows 10 64-Bit<br>Windows 8.1 32-Bit<br>Windows 8.1 64-Bit |

## Interface

|           |   |
|-----------|---|
| External: | 2 x USB 20 Gbps USB Type-C™ female                          |
| Internal: | 1 x SATA 15 pin power connector<br>1 x PCI Express x8, V2.0 |

## Technical characteristics

|                     |                                    |
|---------------------|------------------------------------|
| Chipset:            | Asmedia ASM3242<br>Asmedia ASM1824 |
| Data transfer rate: | 20 Gbps                            |

## Herstellerinformation

|          |                   |
|----------|-------------------|
| Strasse  | Beeskowdamm 13/15 |
| PLZ      | 14167             |
| Ort      | Berlin            |
| Land     | Deutschland       |
| E-Mail   | info@delock.de    |
| Webseite | www.delock.de     |