


Delock PCI Card > 8 x Serial RS-232 High Speed 921K

Description

The Delock PCI card expands your system by eight High Speed RS-232 ports. Use this card for applications like data logging, machine control systems, automation, development or communication. By the extensive surge protection and the wide temperature range this card can be used in the industrial area.

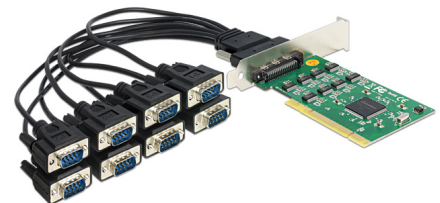

Item no. 89329

EAN: 4043619893294

Country of origin: Taiwan,
Republic of China

Package: Box

Specification

- Chipset: Systembase SB16C1058PCI
- Connector:
 - external:
 - 1 x VHDCI 68 pin female
 - connecting cable: VHDCI 68 pin male > 8 x Serial RS-232
 - D-Sub 9 pin male
 - internal:
 - 1 x PCI
- Baud rate: up to 921.6 Kb/s
- Compatible to 16C550 UART
- FIFO 256 Byte
- Data bit: 5, 6, 7, 8
- Stop bit: 1, 1.5, 2
- Parity: None, Even, Odd, Space, Mark
- Flow Control: RTS / CTS, XON / XOFF
- Operating temperature: -30 °C ~ +75 °C
- Storage temperature: -40 °C ~ +85 °C
- Ambient relative humidity max. 95 % (non-condensing)
- 15 kV ESD protection for all signals

- Bus: universal 32/64 Bit 3.3/5 V PCI version 2.1, 2.2, 2.3 and PCI-X
- I/O address and IRQ assigned by the system

System requirements

- Windows XP/XP-64/Vista/Vista-64/7/7-64, Linux ex Kernel 2.6
- PC with a free PCI slot

Package content

- PCI card
- Low profile bracket
- 1 serial connecting cable (ca. 30 cm)
- Driver CD
- User manual

Images

