


Delock PCI Express x1 Card to 1 x Serial RS-232 High Speed 921K with Voltage supply

Popis

The Delock PCI Express card expands your system by one High Speed RS-232 port. Use this card for applications like data logging, machine control systems, automation, development or communication. By the extensive surge protection and the wide temperature range this card can be used in the industrial area. Connected devices can be supplied with voltage of 5 V or 12 V optionally.

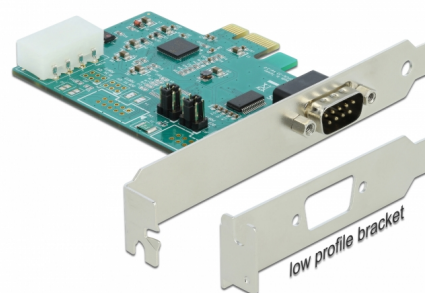

Číslo produktu 89333

EAN: 4043619893331

Země původu: Taiwan,
Republic of China

Balení: Box

Specifikace

- Chipset: Exar 17V352
- Connector:
 - external:
 - 1 x Serial RS-232 D-Sub 9 Pin male
 - internal:
 - 1 x PCI Express x1, V2.0
 - 1 x 4 pin Molex power connector
- Baud rate: up to 921.6 Kb/s
- Compatible to 16C550 UART
- FIFO 256 Byte
- Data bit: 5, 6, 7, 8
- Stop bit: 1, 1.5, 2
- Parity: None, Even, Odd, Space, Mark
- Flow Control: RTS / CTS, XON / XOFF
- Selectable voltage supply 5 V / 12 V on RI of pin 9 and DCD of pin 1
- Electrical power per port: 2.5 watt (5 V / 0.5 A)
- Electrical power per port: 6 watt (12 V / 0.5 A)
- Signals: DCD/12V/5V, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI/12V/5V

- Operating temperature: -30 °C ~ +75 °C
- Storage temperature: -40 °C ~ +85 °C
- Ambient relative humidity max. 95 % (non-condensing)
- 15 kV ESD protection for all signals
- I/O address and IRQ assigned by the system


Systémové požadavky

- Windows XP/XP-64/Vista/Vista-64/7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.6
- PC with a free PCI Express slot
- Power supply with a free Molex power connector

Obsah balení

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

Příslušenství



General

Provedení:	Low Profile
Funkce :	Plug & Play Power over Serial
Specifikace:	RS-232 (EIA / TIA) PCI Express 2.0
Supported operating system:	Windows 10 32-bit Windows 10 64-bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Vista 32-bit Windows Vista 64-bit Windows XP 32-bit Windows XP 64-bit
Slot:	PCIe

Interface

Externí:	2 x sériový port RS-232 DB9 samec
Interní:	1 x PCI Express x1, V2.0

Technical characteristics

Chipsetem:	MaxLinear XR17V352
Rychlost přenosu dat:	2 x 921,6 Kbps
FIFO:	2 x 256 Byte
Jumper:	2 x
Provozní teplota:	-30 °C ~ 75 °C
Maximum current:	5V/500 mA per port 12V/500 mA per port

Napětí:	Napětí 5 V nebo 12 V může být nastaveno individuálně pro každý port zvlášť pomocí propojek (jumper, Pin 1 nebo 9)
UART:	16C550