


Delock PCI Express x1 Card to 1 x Serial RS-232 High Speed 921K with Voltage supply

Description

The Delock PCI Express card expands your system by one High Speed RS-232 port. Use this card for applications like data logging, machine control systems, automation, development or communication. By the extensive surge protection and the wide temperature range this card can be used in the industrial area. Connected devices can be supplied with voltage of 5 V or 12 V optionally.

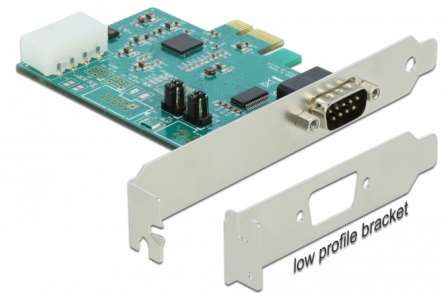

N° produit 89333

EAN: 4043619893331

Pays d'origine: Taiwan,
Republic of China

Emballage: Box

Spécifications techniques

- Chipset: Exar 17V352
- Connector:
external:
1 x Serial RS-232 D-Sub 9 Pin male
internal:
1 x PCI Express x1, V2.0
1 x 4 pin Molex power connector
- Baud rate: up to 921.6 Kb/s
- Compatible to 16C550 UART
- FIFO 256 Byte
- Data bit: 5, 6, 7, 8
- Stop bit: 1, 1.5, 2
- Parity: None, Even, Odd, Space, Mark
- Flow Control: RTS / CTS, XON / XOFF
- Selectable voltage supply 5 V / 12 V on RI of pin 9 and DCD of pin 1
- Electrical power per port: 2.5 watt (5 V / 0.5 A)
- Electrical power per port: 6 watt (12 V / 0.5 A)
- Signals: DCD/12V/5V, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI/12V/5V

- Operating temperature: -30 °C ~ +75 °C
- Storage temperature: -40 °C ~ +85 °C
- Ambient relative humidity max. 95 % (non-condensing)
- 15 kV ESD protection for all signals
- I/O address and IRQ assigned by the system


Configuration système requise

- Windows XP/XP-64/Vista/Vista-64/7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.6
- PC with a free PCI Express slot
- Power supply with a free Molex power connector

Contenu de l'emballage

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

Image



General

Facteur de forme :	profil bas
Fonction :	Plug & Play Power over Serial
Spécifications techniques:	RS-232 (EIA / TIA) PCI Express 2.0
Supported operating system:	Windows 10 32-bit Windows 10 64-bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Vista 32-bit Windows Vista 64-bit Windows XP 32-bit Windows XP 64-bit
Slot:	PCIe

Interface

Externe:	2 x RS-232 DB9 mâle
Interne:	1 x PCI Express x1, V2.0

Technical characteristics

Chipset:	MaxLinear XR17V352
Débit de données:	2 x 921,6 Kbps
FIFO:	2 x 256 Byte
Jumper:	2 x
Température de fonctionnement :	-30 °C ~ 75 °C
Maximum current:	5V/500 mA per port 12V/500 mA per port

Tension:	5 V ou 12 V de tension pouvant être réglée séparément pour chaque port avec le cavalier (broche 1 ou 9)
UART:	16C550