


Delock PCI Express x1 Card to 1 x Serial RS-232 High Speed 921K with Voltage supply

Περιγραφή

The Delock PCI Express card expands your system by one High Speed RS-232 port. Use this card for applications like data logging, machine control systems, automation, development or communication. By the extensive surge protection and the wide temperature range this card can be used in the industrial area. Connected devices can be supplied with voltage of 5 V or 12 V optionally.

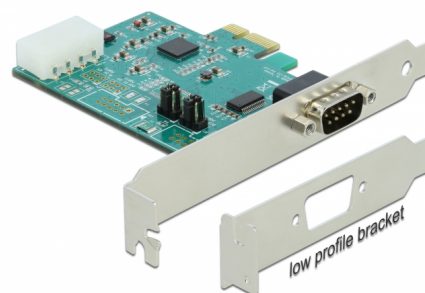

Αρ. προϊόντος 89333

EAN: 4043619893331

Χώρα προέλευσης:
Taiwan, Republic of
China

Συσκευασία: Συσκευασία

Χαρακτηριστικά

- Chipset: Exar 17V352
- Connector:
external:
1 x Serial RS-232 D-Sub 9 Pin male
internal:
1 x PCI Express x1, V2.0
1 x 4 pin Molex power connector
- Baud rate: up to 921.6 Kb/s
- Compatible to 16C550 UART
- FIFO 256 Byte
- Data bit: 5, 6, 7, 8
- Stop bit: 1, 1.5, 2
- Parity: None, Even, Odd, Space, Mark
- Flow Control: RTS / CTS, XON / XOFF
- Selectable voltage supply 5 V / 12 V on RI of pin 9 and DCD of pin 1
- Electrical power per port: 2.5 watt (5 V / 0.5 A)
- Electrical power per port: 6 watt (12 V / 0.5 A)

- Signals: DCD/12V/5V, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI/12V/5V
- Operating temperature: -30 °C ~ +75 °C
- Storage temperature: -40 °C ~ +85 °C
- Ambient relative humidity max. 95 % (non-condensing)
- 15 kV ESD protection for all signals
- I/O address and IRQ assigned by the system


Απαιτήσεις συστήματος

- Windows XP/XP-64/Vista/Vista-64/7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.6
- PC with a free PCI Express slot
- Power supply with a free Molex power connector

Περιεχόμενα συσκευασίας

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

Εικόνες



General

Παράγοντας μορφής:	Χαμηλής Κατανομής
Λειτουργία :	Plug & Play Power over Serial
Προδιαγραφές:	RS-232 (EIA / TIA) PCI Express 2.0
Supported operating system:	Windows 10 32-bit Windows 10 64-bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Vista 32-bit Windows Vista 64-bit Windows XP 32-bit Windows XP 64-bit
Slot:	PCIe

Interface

Εξωτερικά:	2 x σειριακή αρσενική θύρα RS-232 DB9
Εσωτερικός:	1 x PCI Express x1, V2.0

Technical characteristics

Chipset:	MaxLinear XR17V352
Ρυθμός μεταφοράς δεδομένων:	2 x 921,6 Kbps
FIFO:	2 x 256 Byte
Βραχυκυκλωτήρας:	2 x
Θερμοκρασία λειτουργίας:	-30 °C ~ 75 °C
Maximum current:	5V/500 mA per port 12V/500 mA per port



Τάση:	Η τάση 5 V ή 12 V μπορεί να ρυθμίζεται μεμονωμένα για κάθε θύρα μέσω του διακλαδωτή (Πείρος 1 ή 9)
UART:	16C550