


Delock PCI Express x1 Card to 1 x Serial RS-232 High Speed 921K with Voltage supply

Opis

The Delock PCI Express card expands your system by one High Speed RS-232 port. Use this card for applications like data logging, machine control systems, automation, development or communication. By the extensive surge protection and the wide temperature range this card can be used in the industrial area. Connected devices can be supplied with voltage of 5 V or 12 V optionally.

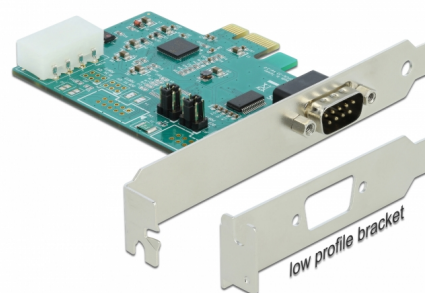

Numer artykułu 89333

EAN: 4043619893331

Kraj pochodzenia:
Taiwan, Republic of
China

Opakowanie: Box

Specyfikacja

- Chipset: Exar 17V352
- Connector:
external:
1 x Serial RS-232 D-Sub 9 Pin male
internal:
1 x PCI Express x1, V2.0
1 x 4 pin Molex power connector
- Baud rate: up to 921.6 Kb/s
- Compatible to 16C550 UART
- FIFO 256 Byte
- Data bit: 5, 6, 7, 8
- Stop bit: 1, 1.5, 2
- Parity: None, Even, Odd, Space, Mark
- Flow Control: RTS / CTS, XON / XOFF
- Selectable voltage supply 5 V / 12 V on RI of pin 9 and DCD of pin 1
- Electrical power per port: 2.5 watt (5 V / 0.5 A)
- Electrical power per port: 6 watt (12 V / 0.5 A)

- Signals: DCD/12V/5V, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI/12V/5V
- Operating temperature: -30 °C ~ +75 °C
- Storage temperature: -40 °C ~ +85 °C
- Ambient relative humidity max. 95 % (non-condensing)
- 15 kV ESD protection for all signals
- I/O address and IRQ assigned by the system


Wymagania systemowe

- Windows XP/XP-64/Vista/Vista-64/7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.6
- PC with a free PCI Express slot
- Power supply with a free Molex power connector

Zawartość opakowania

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

Zdjęcia



General

Kształt:	niskoprofilowa
Funkcja :	Plug & Play Power over Serial
Specyfikacja :	RS-232 (EIA / TIA) PCI Express 2.0
Supported operating system:	Windows 10 32-bit Windows 10 64-bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Vista 32-bit Windows Vista 64-bit Windows XP 32-bit Windows XP 64-bit
Slot:	PCIe

Interface

Zewnętrzne:	2 x szeregowo RS-232 DB9 męskie
Wewnętrzne:	1 x PCI Express x1, V2.0

Technical characteristics

Chipset:	MaxLinear XR17V352
Szybkość transmisji danych:	2 x 921,6 Kbps
FIFO:	2 x 256 Byte
Zworka:	2 x
Temperatura robocza:	-30 °C ~ 75 °C
Maximum current:	5V/500 mA per port 12V/500 mA per port

Napięcie:	Napięcie 5 V lub 12 V można ustawić indywidualnie dla każdego portu, przez zwórkę (Pin 1 lub 9)
UART:	16C550