


Delock PCI Express x1 Card to 1 x Serial RS-232 High Speed 921K with Voltage supply

Leírás

The Delock PCI Express card expands your system by one High Speed RS-232 port. Use this card for applications like data logging, machine control systems, automation, development or communication. By the extensive surge protection and the wide temperature range this card can be used in the industrial area. Connected devices can be supplied with voltage of 5 V or 12 V optionally.

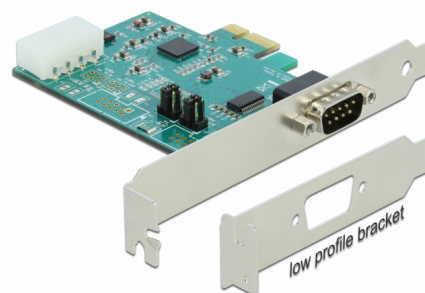

Tételszám 89333

EAN: 4043619893331

Származási hely: Taiwan,
Republic of China

Csomag: Doboz

Műszaki adatok

- Chipset: Exar 17V352
- Connector:
external:
1 x Serial RS-232 D-Sub 9 Pin male
internal:
1 x PCI Express x1, V2.0
1 x 4 pin Molex power connector
- Baud rate: up to 921.6 Kb/s
- Compatible to 16C550 UART
- FIFO 256 Byte
- Data bit: 5, 6, 7, 8
- Stop bit: 1, 1.5, 2
- Parity: None, Even, Odd, Space, Mark
- Flow Control: RTS / CTS, XON / XOFF
- Selectable voltage supply 5 V / 12 V on RI of pin 9 and DCD of pin 1
- Electrical power per port: 2.5 watt (5 V / 0.5 A)
- Electrical power per port: 6 watt (12 V / 0.5 A)
- Signals: DCD/12V/5V, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI/12V/5V

- Operating temperature: -30 °C ~ +75 °C
- Storage temperature: -40 °C ~ +85 °C
- Ambient relative humidity max. 95 % (non-condensing)
- 15 kV ESD protection for all signals
- I/O address and IRQ assigned by the system


Rendszerkövetelmények

- Windows XP/XP-64/Vista/Vista-64/7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.6
- PC with a free PCI Express slot
- Power supply with a free Molex power connector

A csomag tartalma

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

Képek



General

Formatényező:	alacsony profilú
Funkció:	Plug & Play Power over Serial
Műszaki adatok:	RS-232 (EIA / TIA) PCI Express 2.0
Supported operating system:	Windows 10 32-bit Windows 10 64-bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Vista 32-bit Windows Vista 64-bit Windows XP 32-bit Windows XP 64-bit
Slot:	PCIe

Interface

Külső:	2 x soros RS-232 DB9 dugó
Belső:	1 x PCI Express x1, V2.0

Technical characteristics

Lapkakészlet:	MaxLinear XR17V352
Sebességű adatátvitel:	2 x 921,6 Kbps
FIFO:	2 x 256 Byte
Jumper:	2 x
Működési hőmérséklet:	-30 °C ~ 75 °C
Maximum current:	5V/500 mA per port 12V/500 mA per port

Feszültség:	Az 5 V és 12 V feszültséget jumper segítségével lehet beállítani minden csatlakozó esetében (1 és 9 sz. tű).
UART:	16C550