


Delock PCI Express Card to 6 x Serial

Description

The Delock PCI Express card expands your PC by six external serial ports. You can connect devices like scanner, printer, mouse etc. to the card.

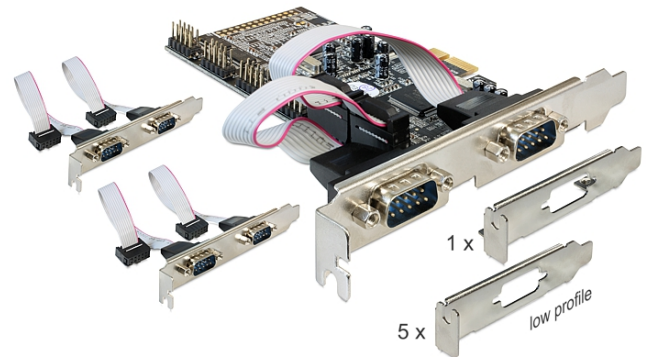

Specification

- Connector:
 - external:
 - 2 x serial RS-232 DB9 male
 - 2 x serial RS-232 DB9 male (separate rear bracket)
 - 2 x serial RS-232 DB9 male (separate rear bracket)
 - internal:
 - 1 x PCI Express x1, V1.1
- Chipset: Moschip
- Data transfer rate up to 230.4 Kb/s
- FIFO: 256 byte
- Compatible with 16C550 UART

System requirements

- Windows
 - Server-2003/Server-2003-64/Vista/Vista-64/7/7-64/8/8-64/8.1/8.1-64/10/10-64,
 - Linux Kernel 2.6
- PC with one free PCI Express slot and two rear slot

Package content

- PCI Express card
- 2 x rear bracket
- 6 x low profile bracket
- Driver CD
- User manual

Item no. 89347

EAN: 4043619893478

Country of origin: China

Package: Blister

Images



General	
Form factor:	Low Profile
Specification:	RS-232 (EIA / TIA) PCIe 1.1
Supported operating system:	Linux Kernel 2.6 or above Windows 10 32-bit Windows 10 64-bit Windows 7 32-bit Windows 7 64-bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows Server 2003 32-bit Windows Server 2003 64-bit Windows Vista 32-bit Windows Vista 64-bit
Slot:	PCIe
Interface	
External:	6 x Serial RS-232 DB9 Plug
Internal:	1 x PCI Express x1, V1.1
Technical characteristics	
Chipset:	ASIX MCS9922 ASIX MCS9901
Data transfer rate:	6 x up to 230,4 Kbps
FIFO:	6 x 256 Byte
UART:	16C450 / 16C550 / 16C650
Physical characteristics	
Slot bracket:	low profile standard
Colour:	black