


Delock Slot Bracket > 1 x Serial Pin layout: twisted

Description

This Delock slot bracket can be installed into a free slot of your PC and enables you to lead out one internal COM port in order to connect one external serial device.

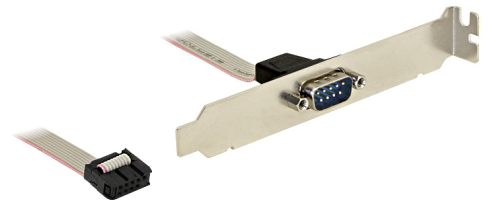

25 cm

Item no. 89353

EAN: 4043619893539

Country of origin: China

Package: Poly bag

Technical details

- Connection: 1 x serial DB9 external
- Slot bracket for installation into PC slot
- Cable length: ca. 25 cm
- Pin layout serial > internal port
1-1, 6-2, 2-3, 7-4, 3-5, 8-6, 4-7, 9-8, 5-9


System requirements

- PC with a free PC slot
- One free COM port internal

Package content

- Slot bracket 1 x COM port

Images



Pin	
1	DCD
2	DSR
3	RX
4	RTS
5	TX
6	CTS
7	DTR
8	RI
9	GND

Pin	
1	DCD
2	RX
3	TX
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	RI

General

Form factor:	Slot bracket
Specification:	RS-232 (EIA / TIA)
Slot:	DB9

Interface

Connector:	Belegung gedreht
External:	1 x Sub-D 9 pin male
Internal:	1 x 9 pin COM port pin header female

Physical characteristics

Pitch distance:	2.54 mm
Connector color:	black
Cable colour:	grey red
Cable length:	25 cm
Screw type:	#4-40 UNC
Slot bracket:	standard

Herstellerinformation

Strasse	Beeskowdamm 13/15
PLZ	14167
Ort	Berlin
Land	Deutschland
E-Mail	info@delock.de
Webseite	www.delock.de