


# Delock PCI Express Card to 1 x Parallel

## Description

The Delock PCI Express card expands a PC by one external parallel port. Different devices such as scanner, printer etc. can be connected to this card. By using the included low profile bracket, the PCI Express card can be also installed into a Mini-PC.

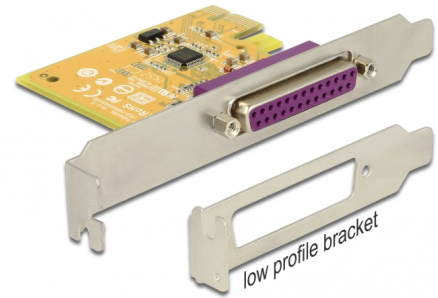

**Item no. 89445**

EAN: 4043619894451

Country of origin: China

Package: Retail Box

## Special features

- This PCIe card is Windows Server 2019 WHQL certified

## Specification

- Connector:  
external: 1 x Parallel DB25 female  
internal: 1 x PCI Express x1, V2.0
- Chipset: SUN2212
- Data transfer rate up to 1.8 MB/s
- FIFO: 16 byte
- SPP, EPP, ECP, BPP compatible to IEEE 1284
- Windows WHQL certified

## System requirements


- Windows 7/7-64/8/8-64/8.1/8.1-64/10/10-64/11, Windows Server 2012 / 2016 / 2019
- PC with one free PCI Express slot

---

## Package content

- PCI Express card
  - Low profile bracket
  - Driver CD
  - User manual
- 

## Images



## General

|                             |  |
|-----------------------------|--|
| Form factor:                | Low Profile  |
| Specification:              | IEEE1284<br>SPP, EPP, ECP, BPP   |
| Supported operating system: | Windows 10 32-Bit<br>Windows 10 64-Bit<br>Windows 7 32-Bit<br>Windows 7 64-Bit<br>Windows 8 32-bit<br>Windows 8 64-bit<br>Windows 8.1 32-Bit<br>Windows 8.1 64-Bit<br>Windows Server 2012 R2<br>Windows Server 2012<br>Windows Server 2016<br>Windows 11 |
| Slot:                       | PCIe   |

## Interface

|           |                          |
|-----------|--------------------------|
| External: | 1 x Parallel DB25 female |
| Internal: | 1 x PCI Express x1, V2.0 |

## Technical characteristics

|                        |                |
|------------------------|----------------|
| Chipset:               | SUN2212        |
| Data transfer rate:    | 1,8 MB/s       |
| FIFO:                  | 16 byte        |
| Operating temperature: | 0 °C ~ 60 °C   |
| Humidity:              | 5 ~ 95 %       |
| Data transmission:     | Bi-directional |

## Physical characteristics

|               |                         |
|---------------|-------------------------|
| Slot bracket: | Low Profile<br>standard |
| Length:       | 69 mm                   |
| Width:        | 65 mm                   |
| Height:       | 11 m                    |