


Delock PCI Express Card to 1 x Serial + 1 x Parallel

Description

The Delock PCI Express card expands a PC by one external serial port and one external parallel port. Different devices such as scanner, printer, mouse etc. can be connected to this card.

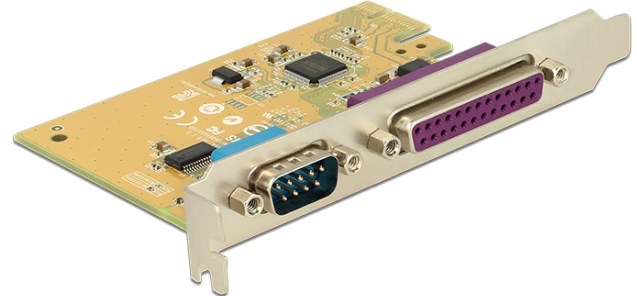

Special features

This PCIe card 1 x Serial + 1 x Parallel is Windows Server 2019 WHQL certified

Specification

- Connector:
 - external:
 - 1 x serial RS-232 DB9 male
 - 1 x Parallel DB25 female
 - internal:
 - 1 x PCI Express x1, V2.0
- Chipset: SUN2410
- **Serial specification:**
 - Data transfer rate up to 115.2 Kb/s
 - FIFO: 128 byte
 - Compatible with 16C950 UART
 - Signals: DCD, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI
 - ±15 kV ESD protection for all serial signals meets IEC1000-4-2 standard
- **Parallel specification:**
 - Data transfer rate up to 1.8 MB/s
 - FIFO: 16 byte
 - SPP, EPP, ECP, BPP compatible to IEEE 1284
 - Windows WHQL certified

System requirements

- Linux Kernel 2.6.x or above
- Windows 7 / 7-64 / 8.1 / 8.1-64 / 10 / 10-64 / 11
- Windows 10 Enterprise LTSC 2019 / Windows 10 2016 LTSC / Windows 10 S
- Windows Server 2012 / Server 2012R2 / Server 2016 / Server 2019
- PC with one free PCI Express slot

Package content

- PCI Express card
- Driver CD
- User manual



Item no. 89446

EAN: 4043619894468

Country of origin: China

Package: Retail Box

Images



General	
Specification:	RS-232 (EIA / TIA) PCI Express 2.0 IEEE1284 SPP, EPP, ECP, BPP
Supported operating system:	Windows 10 32-bit Windows 10 64-bit Windows 7 32-bit Windows 7 64-bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows Server 2012 R2 Windows Server 2012 Windows Server 2016 Windows 11
Slot:	PCIe
Interface	
External:	1 x serial RS-232 DB9 male 1 x Parallel DB25 female
Internal:	1 x PCI Express x1, V2.0
Technical characteristics	
Chipset:	SUN2410
Data transfer rate:	Serial 115.2 Kb/s Parallel 1,8 MB/s
FIFO:	Parallel 16 byte Serial 128 byte
Operating temperature:	0 °C ~ 60 °C
UART:	Serial 16C950
Physical characteristics	
Slot bracket:	standard
Length:	65 mm
Width:	69 mm
Overvoltage protection:	±15 kV ESD Human Body Model (HBM) ±15 kV EN / IEC61000-4-2 Air Gap Discharge ±8 kV EN / IEC 61000-4-2 Contact Discharge