


Delock PCI Express x4 Card 2 x RJ45 10 Gigabit LAN X550

Description

The Delock PCI Express card offers two network ports with a data transfer rate up to 10 Gbps with conventional Cat.6 or Cat.6A copper cables.

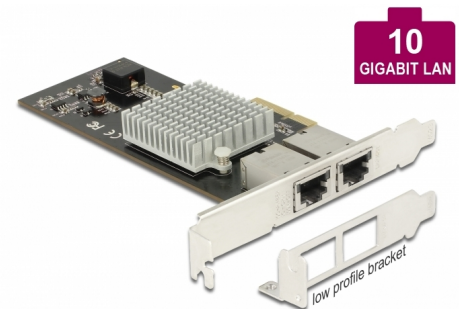

Item no. 89520

EAN: 4043619895205

Country of origin: China

Package: White Box

Specification

- Connector:
external: 2 x 10 Gigabit LAN RJ45 jack
internal: 1 x PCI Express x4, V3.0
- Chipset: Intel X550
- Data transfer rate:
Fast Ethernet up to 100 Mb/s
Gigabit Ethernet up to 1 Gbps
NBASE-T (draft) with up to 2.5 Gbps and 5 Gbps (only Linux)
10 Gigabit Ethernet up to 10 Gbps
PCI Express x4 up to 32 Gbps
- Supports 9k Jumbo frames
- Supports IEEE 802.1Q Virtual LAN* (VLAN)
(* currently not with Windows 10)
- Supports IEEE 802.3bq Virtual Port Aggregation


System requirements

- Windows Server-2008 R2/Server-2012/Server-2012 R2/
7-64/8.1-64/10-64, Linux Kernel 2.6/3.x/4.x
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

Images

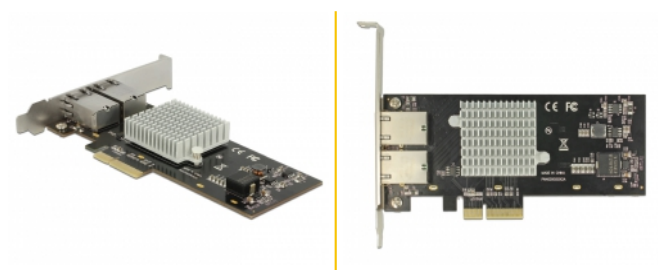

General

Supported operating system:	Linux Kernel 2.6 or above Windows 10 64-Bit Windows 7 64-Bit Windows 8.1 64-Bit Windows Server 2008 R2 Windows Server 2012 R2 Windows Server 2012
-----------------------------	---

Interface

External:	2 x 10 Gigabit LAN RJ45 jack
Internal:	1 x PCI Express x4, V3.0

Technical characteristics

Chipset:	Intel X550
Data transfer rate:	Fast Ethernet up to 100 Mbps Gigabit Ethernet up to 1 Gbps Gigabit Ethernet up to 10 Gbps PCI Express rev. 3.0 up to 4 GB/s

Physical characteristics

Slot bracket:	Low Profile standard
---------------	-------------------------