


Delock PCI Express x4 Card > 2 x internal M.2 Key B with RAID - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by two M.2 slots. It can be connected up to two M.2 SATA modules in format 22110, 2280, 2260, 2242, 2230 to the card. When using more than one SSD, there is the possibility to use different RAID level.

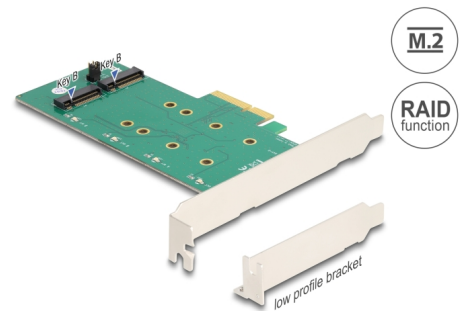

Item no. 89536

EAN: 4043619895366

Country of origin: Taiwan,
Republic of China

Package: Box

Technical details

- Connector:
internal:
2 x 67 pin M.2 key B slot
1 x PCI Express x4
- Interface: SATA
- Supports M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.5 mm application of double-sided assembled modules supported
- Data transfer rate up to 6 Gb/s
- Supports RAID 0, 1, SPAN
- 4 x LED indicator
- Bootable

System requirements


- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux Kernel 3.3

- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- 2 x fixing screw
- User manual

Images

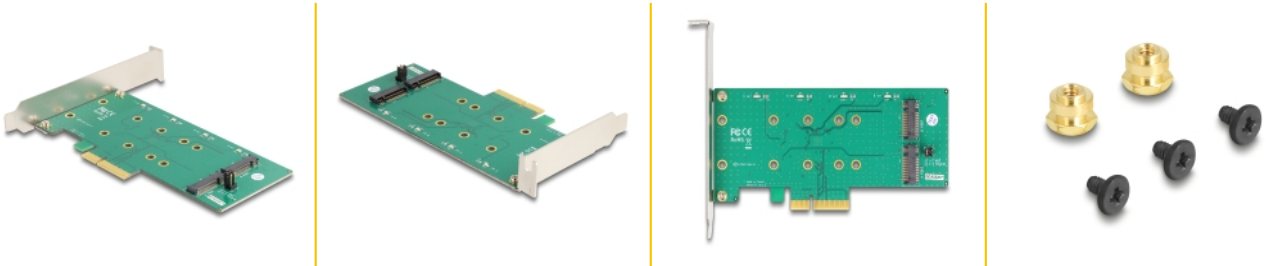

General

Supported operating system:	Linux Kernel 3.19 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
LED indicator:	4 x
Slot:	SATA
Supported module:	M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

Interface

Internal:	1 x PCI Express x4, V2.0 2 x 67 pin M.2 key B slot
-----------	---

Technical characteristics

Data transfer rate:	6 Gb/s
RAID function:	SPAN 0 1

Herstellerinformation

Strasse	Beeskowdamm 13/15
PLZ	14167
Ort	Berlin
Land	Deutschland
E-Mail	info@delock.de
Webseite	www.delock.de