


Delock PCI Card > 1 x Serial RS-232

Description

This PCI card by Delock expands a PC by one external serial port. Different devices such as scanner, printer, mouse etc. can be connected to this card. By using the included low profile bracket, the PCI card can be also installed into a Mini-PC.

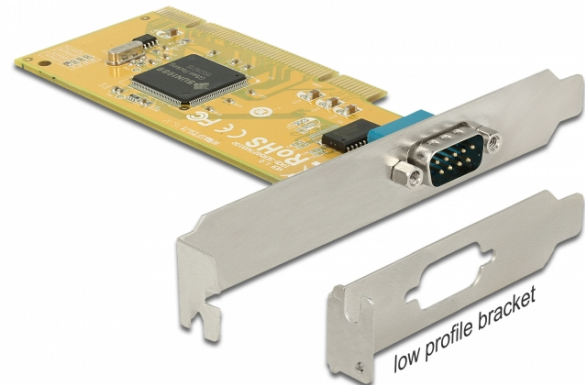

Specification

- Connectors:
external: 1 x serial RS-232 DB9 male
internal: 1 x 32-Bit PCI standard 3.0
- Chipset: SUN1989
- Compliance with PCI 33 MHz Ver. 3.0/2.3/2.2./2.1 specification
- Supports both 64-bit & 32-bit PCI bus slots and 3.3 V & 5 V power
- Signals: DCD, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI
- ±2 kV ESD protection for all serial signals
- Data transfer rate up to 115.2 Kb/s
- FIFO: 128 byte
- Compatible with 16C950 UART
- Operating temperature: 0 °C ~ 60 °C
- Humidity: 5 ~ 95 %
- Windows WHQL certified

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64/11, Linux ex Kernel 2.6.38
- PC with one free PCI slot

Package content

- PCI card
- 1 x low profile bracket
- Driver CD
- User manual



Item no. 89592

EAN: 4043619895922

Country of origin: China

Package: Retail Box

Images



General

Supported operating system:	Linux Kernel 2.6.38 or above Windows 10 32-bit Windows 10 64-bit Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows Server 2012 R2 Windows Server 2012 Windows Server 2016 Windows 11
-----------------------------	--

Protection:	ESD (Electrostatic Discharge)
-------------	-------------------------------

Interface

External:	1 x serial RS-232 DB9 male
Internal:	1 x PCI V3.0/2.3/2.2/2.1

Technical characteristics

Chipset:	SUNIX
Data transfer rate:	up to 115,2 Kb/s
FIFO:	128 byte
Operating temperature:	0 °C ~ 60 °C
Humidity:	5 ~ 95 %
UART:	16C950

Physical characteristics

Slot bracket:	low profile standard
Length:	120 mm
Width:	51 mm
Height:	6.6 mm