


# Delock PCI Express x4 Card U.2 NVMe to 1 x internal SFF-8654 4i + 1 x internal SFF-8643 – Low Profile Form Factor

## Description

This PCI Express card by Delock expands the PC by one SFF-8654 and one SFF-8643 interface. It can be connected e.g. one SSD with U.2 interface by using an optional cable. Only one port can work, not both simultaneously. The card transmits PCI Express signals using the NVMe protocol.

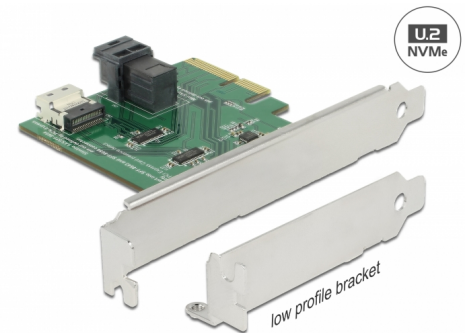

**Item no. 89923**

EAN: 4043619899234

Country of origin: Taiwan,  
Republic of China

Package: Box

## Specification

- Connectors:
  - 1 x 38 pin SFF-8654 4i female
  - 1 x 36 pin SFF-8643 female
  - 1 x PCI Express x4, V3.0
- Data transfer rate up to 24 Gbps
- 1 x LED for attendance
- Bootable, from UEFI version 2.3.1
- Supports NVM Express (NVMe) 1.2




## System requirements

- Linux Kernel 4.3 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

## Package content

- PCI Express card
- Low profile bracket
- Mounting material
- User manual

## Images



## General

Function:	Bootable, ex UEFI 2.3.1
Supported operating system:	Linux Kernel 4.3 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit

## Interface

Internal:	1 x PCI Express x4, V3.0 1 x 36 pin SFF-8643 female 1 x 38 pin SFF-8654 4i female
-----------	---

## Technical characteristics

Data transfer rate:	up to 24 Gbps
Jumper:	2 x