


Riser Card PCI Express x1 to 1 x PCI 32 Bit 5 V Slot Asmedia

Description

The PCI Express riser card by Delock enables the connection of one **PCI card** via one PCI Express interface. The **recess in the slot bracket** allows an external connection of e.g. cables to the built-in PCI card in the computer case.

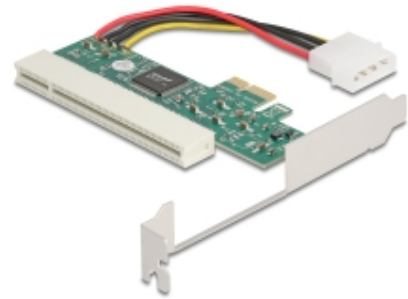

Item no. 90062

EAN: 4043619900626

Country of origin: China

Package: Box

Technical details

- Connectors:
 - 1 x PCI Express x1 >
 - 1 x 32-Bit PCI
 - 1 x power connector 4 pin Molex male
- Chipset: Asmedia ASM1083
- Bootable


System requirements

- Linux Kernel 5.4 or above
- Windows 8.1/8.1-64/10/10-64/11
- Windows Server 2019
- PC with one free PCI Express slot

Package content

- PCIe riser card
- User manual

Images

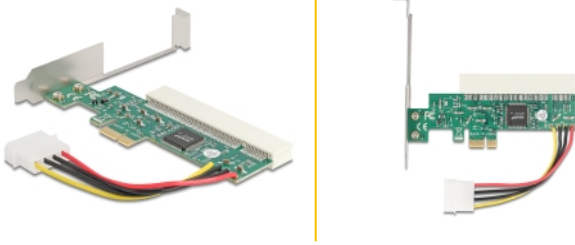

General

Function:	bootable
-----------	----------

Interface

Connector 1:	1 x PCI Express x1
Connector 2:	1 x 32-Bit PCI
Connector 3:	1 x power connector 4 pin Molex male

Technical characteristics

Chipset:	Asmedia ASM1083
----------	-----------------

Manufacturer information

Street	Beeskowdamm 13/15
Postal code	14167
City	Berlin
Country	Deutschland
E-Mail	info@delock.de
Website	www.delock.de

