

Riser Card PCI Express x1 to 2 x PCI 32 Bit Slot with 60 cm cable

Description

The PCI Express riser card by Delock enables the connection of **two PCI cards** via one PCI Express interface. The **flexible cable** allows a space-saving installation inside the computer case.

Please Note

The package content includes a USB 3.0 riser cable with a length of 60 cm. No USB signals are transmitted through this cable, therefore it is not possible to exchange it with a different or longer cable.



Item no. 90066

EAN: 4043619900664

Country of origin: China

Package: Box

Technical details

- Connectors:
 - Motherboard side:
 - 1 x PCI Express x1
 - 1 x SuperSpeed USB (USB 3.2 Gen 1) Type-A female
 - Riser side:
 - 2 x 32-Bit PCI
 - 1 x SuperSpeed USB (USB 3.2 Gen 1) Type-A female
 - 1 x SATA power connector
- Chipset: Asmedia ASM1083
- Bootable
- 1 x jumper for 5 V or 3.3 V setting
- 4 x mounting holes on the riser card
- Cable data:
 - 1 x riser cable USB 3.0 Type-A male to male ca. 60 cm (incl. connectors)


System requirements

- Linux Kernel 5.4 or above
- Windows 8.1/8.1-64/10/10-64/11
- Windows Server 2019
- PC with one free PCI Express slot

Package content

- PCIe to USB riser card
- USB to PCI riser card
- USB cable
- User manual

Images

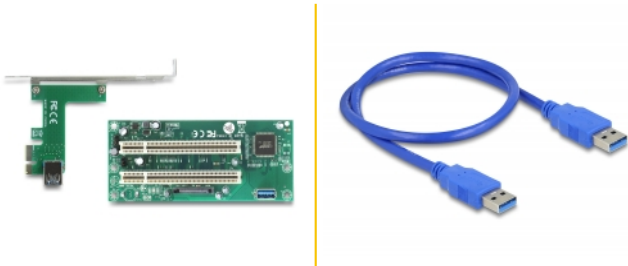

General

Function:	bootable
Supported operating system:	Linux Kernel 5.4 or above Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2019

Interface

Connector 1:	1 x PCI Express x1
Connector 2:	2 x 32-Bit PCI
Connector 3:	1 x SATA 15 pin power connector

Technical characteristics

Chipset:	Asmedia ASM1083
----------	-----------------

Manufacturer information

Street	Beeskowdamm 13/15
Postal code	14167
City	Berlin
Country	Deutschland
E-Mail	info@delock.de
Website	www.delock.de