


# Delock PCI Express x1 Card to 2 x external USB 3.2 Gen 1 Type-A + 1 x internal 19 pin USB pin header male - Low Profile Form Factor

## Description

This PCI Express card by Delock expands the PC by **two external USB 3.2 ports** as well as **one internal 19 pin USB pin header male** port. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the card.

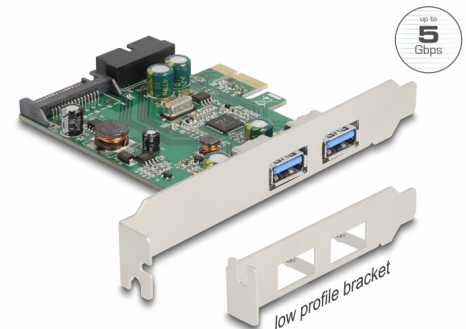

**Item no. 90096**

EAN: 4043619900961

Country of origin: China

Package: Retail Box

## Specification

- Connectors:  
external: 2 x SuperSpeed USB 5 Gbps (USB 3.2 Gen 1) Type-A female  
internal:  
1 x 19 pin USB pin header male  
1 x SATA power connector  
1 x PCI Express x1, V2.0
- Chipset: VIA VL805
- Data transfer rate up to:  
SuperSpeed USB 5 Gbps,  
Hi-Speed 480 Mbps,  
Full-Speed 12 Mbps,  
Low-Speed 1.5 Mbps
- Supports UASP
- Supports eXtensible Host Controller Interface (xHCI) specification 1.0
- Bootable

## System requirements

- Linux Kernel 5.13 or above
- Windows 8.1/8.1-64/10/10-64/11
- PC with one free PCI Express slot
- Power supply with a free SATA power connector

---

## Package content

- PCI Express card USB 3.0
- Low profile bracket
- User manual

---

## Images



## General

Function:	bootable
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11 Linux Kernel 5.13 or above

## Interface

External:	2 x USB 5 Gbps Type-A female
Internal:	1 x PCI Express x1, V2.0 1 x SATA 15 pin power connector 1 x 19 pin USB pin header male

## Technical characteristics

Chipset:	VIA VL805
Data transfer rate:	5 Gbps