


# Delock PCI Express x4 Card to 1 x external USB Type-C™ female + 1 x external USB Type-A female SuperSpeed USB 10 Gbps (USB 3.1 Gen 2)

## Description

This PCI Express card by Delock expands the PC by two external USB 3.1 ports. Different USB Type-A devices, such as docking stations, card readers, external enclosure etc., can be connected to the card. The card allows a data transfer rate of 10 Gbps on both ports when used simultaneously.

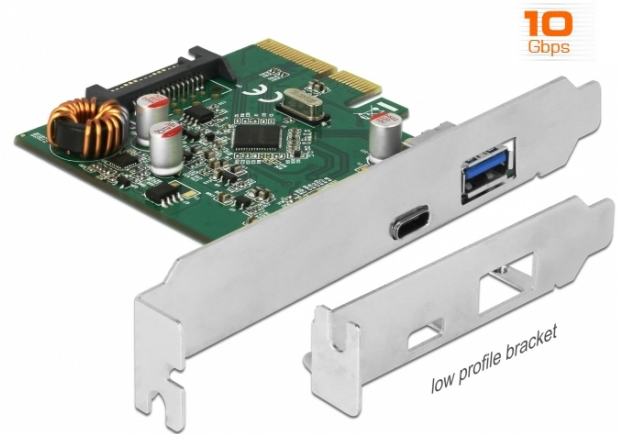

## Specification

- Connectors:
  - external:
    - 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female
    - 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) Type-A female
  - internal:
    - 1 x SATA 15 pin power connector
    - 1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3142
- Data transfer rate up to:
  - SuperSpeed USB 10 Gbps,
  - SuperSpeed USB 5 Gbps,
  - Hi-Speed 480 Mbps,
  - Full-Speed 12 Mbps,
  - Low-Speed 1.5 Mbps
- Downwards compatible to USB 3.0, USB 2.0, USB 1.1
- Power supply via PCI Express interface or via 15 pin power connector
- Electrical power per port:
  - USB Type-C™: max. 15 watt (5 V / 3 A)
  - USB Type-A: max. 4.5 watt (5 V / 0.9 A)
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Supports Multiple INs

## System requirements

- Linux Kernel 4.6 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

## Package content

- PCI Express card SuperSpeed USB 10 Gbps
- Low profile bracket
- Driver CD
- User manual

## Item no. 90299

EAN: 4043619902996

Country of origin: China

Package: • Retail Box

Images



- external ① 1 x SuperSpeed USB 10 Gbps USB 3.1 Gen 2 Type-C™ female
- external ② 1 x SuperSpeed USB 10 Gbps USB 3.1 Gen 2 Type-A female
- external ③ 1 x USB 3.1 Gen 2 power connector
- external ④ 1 x PCI Express x4 16x

General	
Form factor:	Low Profile
Supported operating system:	Linux Kernel 4.6 or above Windows 10 32-bit Windows 10 64-bit Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit
Interface	
External:	1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Typ-A Buchse 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female
Internal:	1 x PCI Express x4, V3.0 1 x SATA 15 pin power connector
Technical characteristics	
Chipset:	Asmedia ASM3142
Data transfer rate:	USB 3.1 Gen 2 up to 10 Gb/s
Physical characteristics	
Slot bracket:	low profile standard