


Delock PCI Express x16 Card to 8 x internal SFF-8643 NVMe - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by **eight SFF-8643** interfaces. SSDs with e.g. U.2 interface can be connected to these ports by using an optional cable.

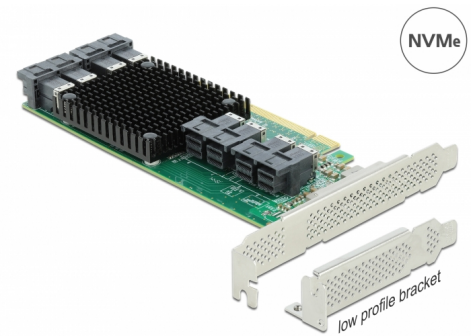

Item no. 90504

EAN: 4043619905041

Country of origin: China

Package: White Box

Specification

- Connectors:
8 x SFF-8643 female
1 x PCI Express x16, V3.0
- Chipset: Broadcom PEX8749
- Data transfer rate up to 32 Gbps
- Supports NVM Express (NVMe)
- Bootable, ex UEFI version 2.3.1
- 1 x LED indicator
- Humidity: 15 ~ 90 %
- Operating temperature: 5 °C ~ 50 °C
- Storage temperature: -25 °C ~ 70 °C

System requirements

- Linux Kernel 3.18.37 or above
- Windows 8.1/8.1-64/10/10-64
- Windows Server 2019

- PC with one free PCI Express x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- User manual

Images



General

| | |
|-----------------------------|--|
| Function: | Bootable, ex UEFI 2.3.1 NVM Express (NVMe) |
| Supported operating system: | Linux Kernel 3.18.37 or above Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2019 |
| LED indicator: | 1 x |

Interface

| | |
|-----------|--|
| Internal: | 1 x PCI Express x16, V3.0 8 x SFF-8643 female |
|-----------|--|

Technical characteristics

| | |
|------------------------|------------------|
| Chipset: | Broadcom PEX8749 |
| Operating temperature: | 5 °C ~ 50 °C |