


PCI Express x8 Card to 2 x internal NVMe M.2 Key M 110 mm - Bifurcation - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by two M.2 slots. M.2 SSDs in format 22110, 2280, 2260 and 2242 can be connected. The card requires the **PCIe bifurcation** of the motherboard to split the PCIe signal in order to use multiple slots with M.2 SSDs.

Please Note

Without PCIe bifurcation only the first M.2 slot of the card can be used.

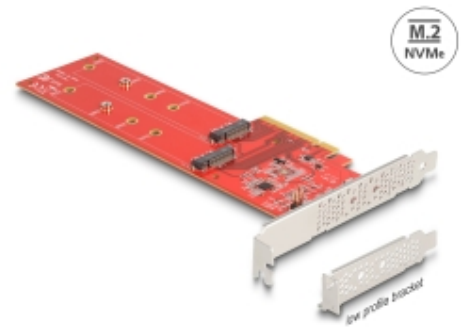

Item no. 90616

EAN: 4043619906161

Country of origin: Taiwan,
Republic of China

Package: Box

Technical details

- Connectors:
internal:
2 x M.2 key M slot
1 x PCI Express x8, V4.0
2 x 2 pin pin header for LED
- Interface: PCIe
- Supports M.2 modules in format 22110, 2280, 2260 and 2242 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports NVM Express (NVMe)
- Bootable, ex UEFI version 2.3.1
- Supports S.M.A.R.T.
- Supports TRIM

System requirements


- Linux Kernel 6.2 or above
- Windows 10/10-64/11
- Windows Server 2022
- PC with one free PCI Express x8 / x16 / x32 slot

- Motherboard and BIOS with PCIe bifurcation support

Package content

- PCI Express card
- Low profile bracket
- 2 x screw
- User manual

Images

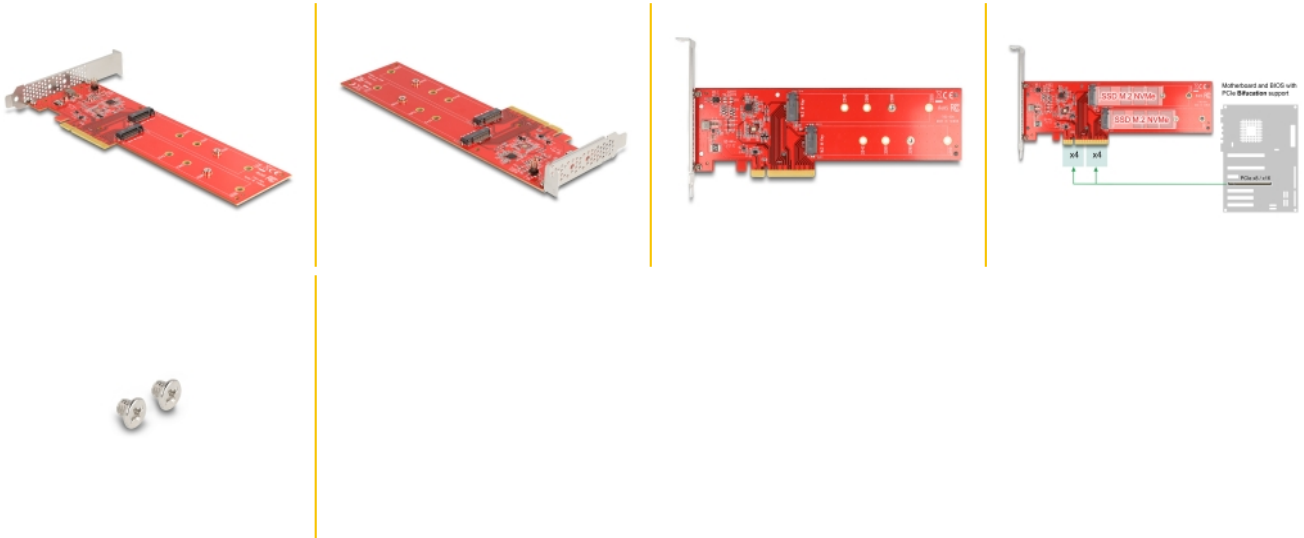

General

Form factor:	Low Profile
Function:	Bootable, ex UEFI 2.3.1 TRIM S.M.A.R.T.
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 11 Windows Server 2022 Linux Kernel 6.2 or above
Slot:	PCIe
Supported module:	M.2 modules in format 22110, 2280, 2260 and 2242 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

Interface

Internal:	1 x PCI Express x8, V4.0 2 x M.2 key M slot 2 x 2 pin pin header for LED
-----------	--

Manufacturer information

Street Beeskowdamm 13/15
 Postal code 14167
 City Berlin
 Country Deutschland
 E-Mail info@delock.de
 Website www.delock.de

