


Delock PCI Express x1 Card to 2 x external FireWire B + 1 x external FireWire A - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by **two external FireWire 800 ports** as well as **one external FireWire 400 port**. Different FireWire devices such as external enclosure, digital cameras, camcorders, adapters etc. can be connected to this card. The PCIe card has a built-in **native PCI Express chipset**, not a bridge chipset.

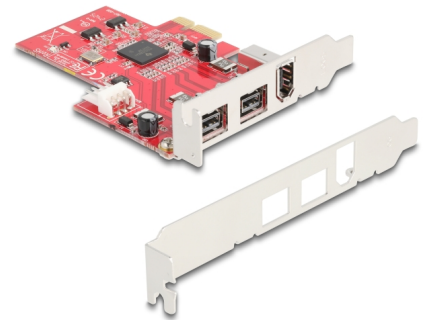

Internal power connector

The 4 pin power connector on the card can be used when FireWire devices have a higher power requirement. For this purpose, a **suitable adapter is included in the package content**, which can be connected to different power supplies.

Item no. 90738

EAN: 4043619907380

Country of origin: Taiwan, Republic of China

Package: Retail Box

Technical details

- Connectors:
 - 2 x FireWire 800 1394B 9 pin
 - 1 x FireWire 400 1394A 6 pin
 - 1 x PCI Express x1, V1.1
 - 1 x 4 pin power connector
- Chipset: Texas Instruments XIO2213B
- Supports OHCI specifications V1.0 and 1.1
- Hot Swap, Plug & Play



System requirements

- Linux Kernel 5.19 or above
- Windows 10/10-64/11
- Windows Server 2019
- PC with one free PCI Express slot

Package content

- PCI Express card
- Standard slot bracket
- Power cable
- User manual

Images



General

Form factor:	Low Profile
Function:	Hot Swap Plug & Play
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows Server 2019 Windows 11 Linux Kernel 5.19 or above

Interface

External:	1 x FireWire 1394A 6 pin female 2 x FireWire 1394B 9 pin female
Internal:	1 x PCI Express x1, V1.1 1 x 4 pin power connector

Technical characteristics

Chipset:	Texas Instruments XIO2213B
----------	----------------------------

Herstellerinformation

Strasse	Beeskowdamm 13/15
PLZ	14167
Ort	Berlin
Land	Deutschland
E-Mail	info@delock.de
Webseite	www.delock.de