


Delock Module MiniPCle I/O PCle full size 2 x Serial RS-422 / 485 with 600 W Surge

Description

This MiniPCle adapter by Delock expands your system by two additional serial ports, which you can lead out through the slot bracket. You can connect different serial devices to this adapter.

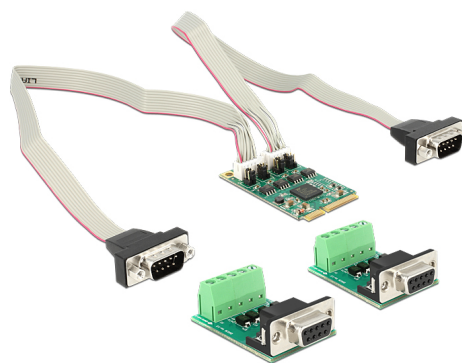

N° produit 95245

EAN: 4043619952458

Pays d'origine: Taiwan,
Republic of China

Emballage: Box

Spécifications techniques

- Connector:
on the module:
2 x 10 pin header male
on the slot bracket (standard): 1 x
2 x serial RS-422 / 485 DB9 male with screw nuts
or on slot bracket (low profile): 2 x
1 x serial RS-422 / 485 DB9 male with screw nuts
- Chipset: Exar XR17V352, SP3078E
- Form factor: miniPCle full size
- Interface: PCI Express revision 2.0
- Data transfer rate up to 921.6 Kb/s
- Compatible with 16C550 UART
- 600 W surge
- Cable length: ca. 30 cm (incl. connector)


Configuration système requise

- Windows Vista/Vista-64/7/7-64/8/8-64/8.1/8.1-64/11, Linux Kernel 2.6
- Mainboard with a free miniPCle slot with a PCIe interface

Contenu de l'emballage

- MiniPCle module
- 2 x serial connection cable (pin header > DB9)
- 2 x terminal block adapter
- 1 x standart slot bracket with two DB9 ports
- 2 x low profile slot bracket with one DB9 ports
- Driver CD
- User manual

Image

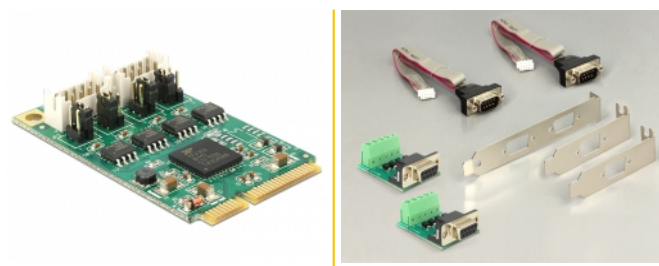

General

Facteur de forme :	Mini PCIe full size (taille complète)
Supported operating system:	Linux Kernel 2.6 ou version ultérieure Windows 10 32-bit Windows 10 64-bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11
Protection:	ESD (Electrostatic Discharge) pic de 600 W

Interface

Connecteur 1:	1 x Mini PCI Express, Rev. 2.0
Connecteur 2:	2 x RS-422 / RS-485

Technical characteristics

Data flow control:	Automatically
Chipset:	Exar 17V352
Débit de données:	RS-422 / RS-485 up to 1 Mbps 75, 110, 134, 150, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 10000, 14400, 19200, 25000, 38400, 50000, 57600, 100000, 115200, 128000, 200000, 230400, 250000, 460800, 500000, 921600 and more
FIFO:	4 x 256 Byte
Jumper:	4 x
Storage temperature:	-40 °C ~ 85 °C
Température de fonctionnement :	-30 °C ~ 75 °C
Humidity:	5 ~ 90 %

Data transmission:	asynchronous Semi-duplex full duplex differential
UART:	16C550
Data bits:	5, 6, 7, 8
Stop bits:	1, 1.5, 2
Terminator:	4 x RS-422 / 485 (On / Off)

Physical characteristics

Cable length incl. connector:	30 cm
-------------------------------	-------